Nozzle holder ST-330, pivotable and lockable

The choice of perfection

Pivoting made easy:
Simple and stepless adjustment of the spray device.

For cleaning hard-to-reach containers:
- Feeding troughs
- Gutters

made entirely of stainless steel





Pivoting nozzle holder with locking screw

- Inlet M18
- For large flow rates up to 45 l / min.
- Maximum pressure: 310 bar
- Maximum temperature: 150 ° C
- Equipped with a cross grip screw made of polyamide / stainless steel to lock the swivel position.
- Including nozzle holder for nozzle tips (catalog, chapter 11)
- Further pivoting and lockable ST-330 versions without nozzle holder can be found on the following page


Perfect for high pressure telescopic lances:
To ensure safe handling, set the water jet at a shallow angle first and increase it gradually as required. (The angular water jet generates a torque on the high pressure gun)



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
200 330 521	tip nozzle	18 x 1.5 F

Can be pivoted up to 240 degrees:
The molded grip screw locks the spray angle set.

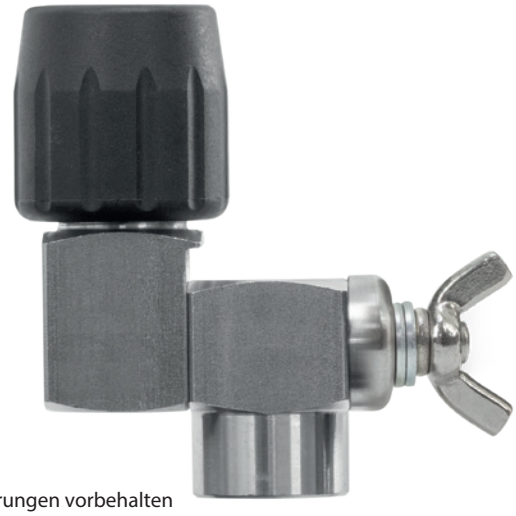


Nozzle holder ST-330, pivotable and lockable

The choice of perfection

ST-330 swivel nozzle holder

» Swivel it easily!
» Used for cleaning of places which are difficult to access such as container e.g. feeding troughs and gutters.
» Effortless and variable shifting of the swivel direction.
» Completely made out of stainless steel.
» Capable of swivelling by up to 240°.



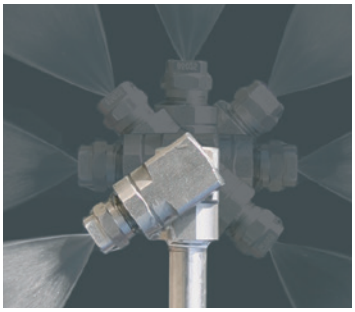





Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
200 330 500	1/4" F NPT	1/4" F
200 330 510	1/4" M	1/4" F



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
200 330 501	1/4" F NPT	1/4" F
200 330 511	1/4" M	1/4" F



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
200 330 521	tip nozzle	M18 F



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
200 330 600	tip nozzle	M18 F

Version 08. 20