ST-456 rotor nozzles with ceramic insert and TR 20 thread

The choice of perfection




The Turbokiller ST-456 with trapezoidal thread from Suttner

- Particularly robust TR 20 thread for easy handling and compatibility
- Suitable for existing systems
- Spray angle 20°







The ST-456 Turbokiller nozzle: Now also available with TR20 thread!

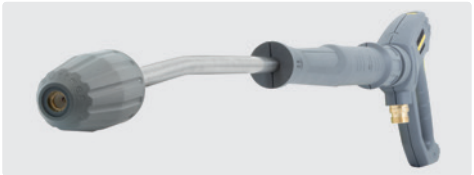



The R+M / Suttner dirt blaster: Suitable for existing systems.

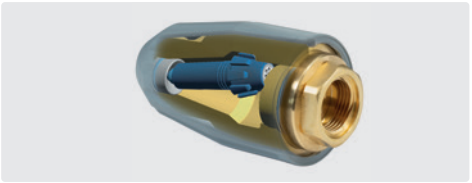

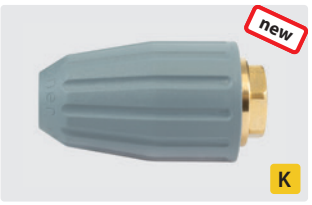

TR 20 F. Spray angle 20°.
Max. 300 bar / 100 °C



Kit ST-456

R+M Nr.	D
200 456 835	035
200 456 840	04
200 456 845	045
200 456 850	05
200 456 855	055
200 456 865	065
200 456 870	07

R+M Nr.
200 456 235
200 456 240
200 456 245
200 456 250
200 456 255
200 456 265
200 456 270

Technical specs

Inlet	TR 20
Max. pressure	300 bar
Max. Temperature	100 °C
Spray Angle	20°
Weight in Gram	420
Housing material	brass
Protection Cap	grey

www.rm-suttner.com