


Wall mounts for Motor-Pump Units



Wall mounts for Motor-Pump Units

- Prepared bore holes for the attachment
- Stainless steel, corrosion-resistant and robust
- 3 variants in different sizes with the following dimensions: 270 x 270 x 500 / 280 x 280 x 260 / 200 x 200 x 150 mm
- All variants are suitable for motor-pump units with type HPV. You will find other suitable combinations on the following page
- All wall brackets are made from one workpiece without welding seams and have a high load capacity
- Optional accessories: Rubber buffer as vibration damper (PU = 4 pieces) made of steel or stainless steel

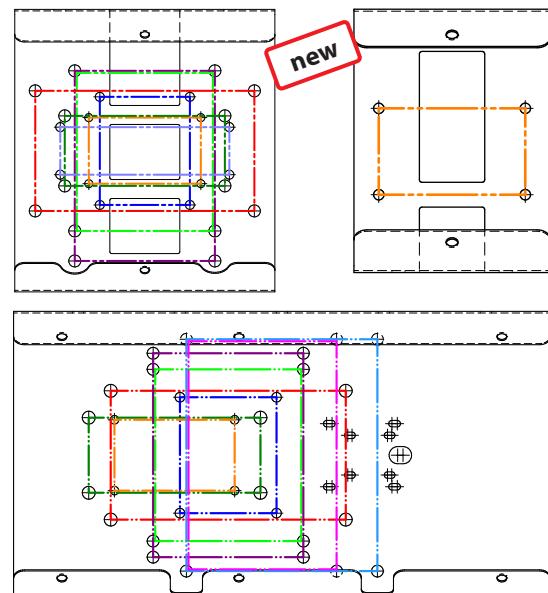

Quick and safe Installation: Proposed holes simplify the mounting of the motors and the bottom filter housings.

Vibration dampers



Rubber buffer type A. M10 x 28. Incl. Screws and washers. Steel or stainless steel with elastic natural rubber 55 °. Spring stiffness: 500 N / mm.

Load: 2000 N

R+M Nr.	height	Ø	material	PU
105 000 101	30	50	steel	4 pieces
105 000 104	30	50	stainless steel	4 pieces



New variants: With just one stabilizing cross strut, the base plates manage without a filter recess.




Stable construction: Corrosion-resistant stainless steel screws on stabilizing cross braces

Wall mounts for Motor-Pump Units



Wall mounts

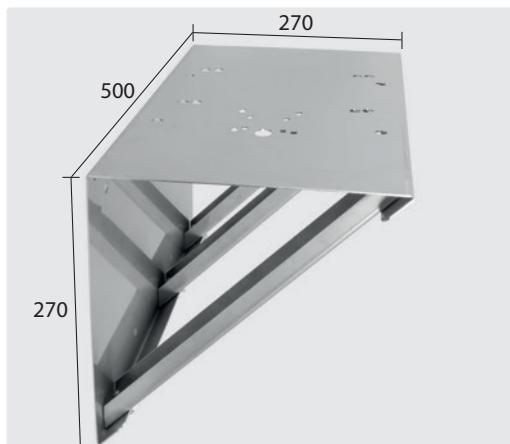

Stainless steel. Suitable for our motor-pump units with 3 / 4 / 5.5 and 7.5 KW

R+M Nr.
105 000 020






Stainless steel. Suitable for our motor-pump units with 3 / 4 and 5.5 KW

R+M Nr.
105 000 022




Stainless steel. Suitable for our motor-pump units with AR HPV


R+M Nr.
105 000 021

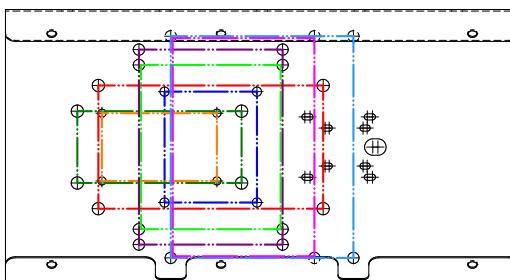

Filter place: set up for the use of plastic filter housings. (2- and 3-part)

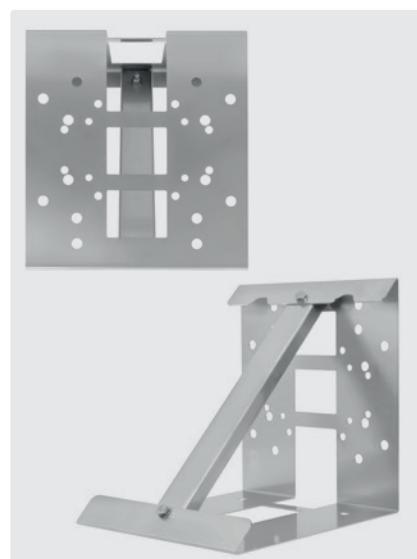

Vibration damper: optionally available and easy to attach. To reduce start vibrations. PU = 4 pieces

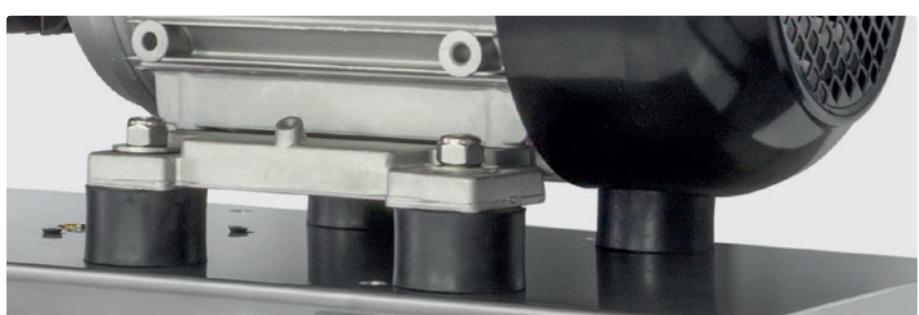


Wall mounts for Motor-Pump Units




Hole dimension	R+M Nr. 105 000 020	R+M Nr. 105 000 022	R+M Nr. 105 000 021
Width 112 mm Depth 66 mm e.g. Anovi Reverberi Typ HPV			
Width 140 mm Depth 190 mm e.g. Anovi Reverberi 4 - 5,5 KW			
Width 219 mm Depth 120 mm e.g. Anovi Reverberi Typ HPE, Typ HPJ with sheet metal			
Width 160 mm Depth 70 mm e.g. Anovi Reverberi Typ HPV with sheet metal			
Width 140 mm Depth 160 mm e.g. Anovi Reverberi 2,2 - 3 KW			
Width 90 mm Depth 108 mm e.g. Anovi Reverberi Typ M			
Width 178 mm Depth 216 mm e.g. Anovi Reverberi 11 KW			
Width 140 mm Depth 216 mm e.g. Anovi Reverberi 7,5 KW			
Width 169 mm Depth 47,5 mm e.g. Anovi Reverberi Typ HPJ			

Wall mounts for Motor-Pump Units

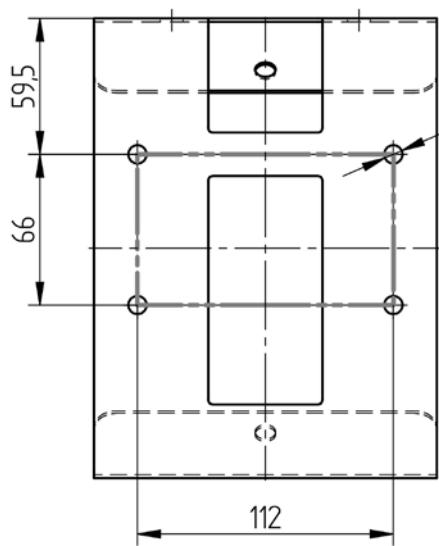

R+M Nr.
105 000 021
Dimension:
Depth 200 mm
Width 150 mm

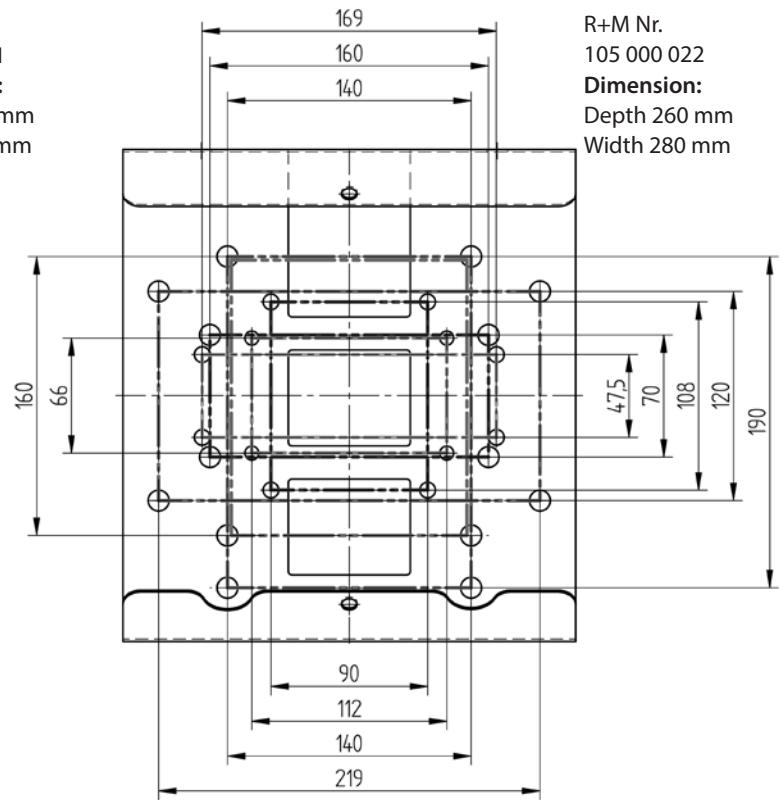

R+M Nr.
105 000 020
Dimension:
Depth 270 mm
Width 500 mm

