


easywash365+ double ceiling boom Z



The choice of perfection

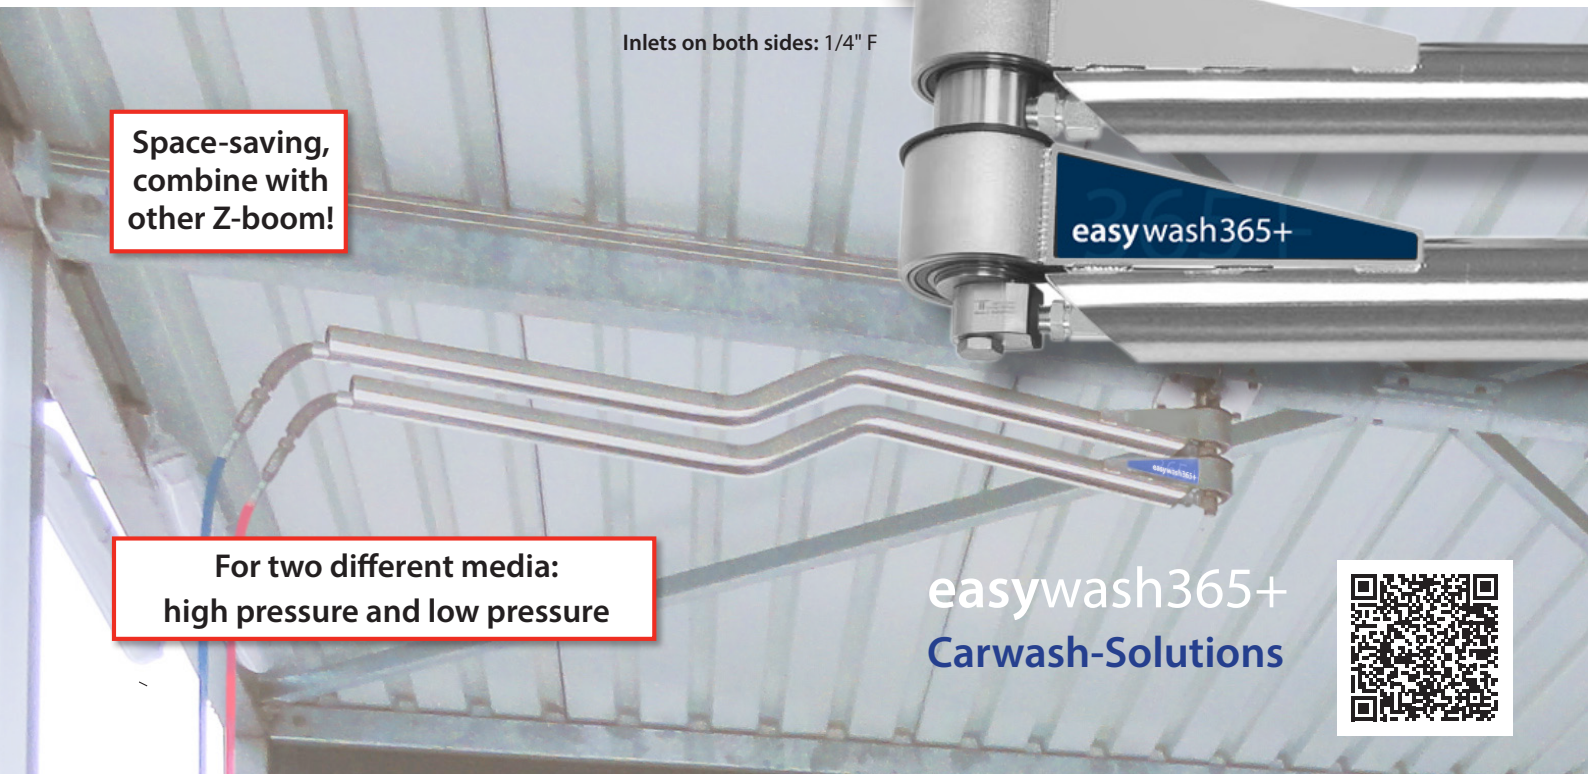

Inlets on both sides: 1/4" F

Space-saving,
combine with
other Z-boom!

For two different media:
high pressure and low pressure

easywash365+
Carwash-Solutions



Z-shaped double ceiling boom, ideal in the pre-wash hall in car washes or in the self-service wash box

- Two 360 degree rotating booms with lengths of 1,550 mm and 1,450 mm on one axis for intersection-free pivoting
- Can be combined with another Z-boom to save space for a three-way setup with a clear, classic look
- Polished stainless steel
- Maximum pressure: 275 bar
- Maximum temperature: 120° C
- Inlet: 1/4" F, outlet 1/4" M

Z-booms, the ideal solution for pre-washing and in self-service car washes




R+M / Suttner expands its product range with Z-shaped booms with this two-arm version. All Z-shaped booms can be used at a distance of 90 cm. The standard Z-boom must be mounted at least 5 cm lower for this purpose. Even small washing bays can be equipped with additional, profitable ceiling booms for rim cleaning, foam application, underbody lance, washing brush or air system booms for vacuuming or drying.

easywash365+ double ceiling boom Z
easywash365+ ceiling boom-Z
easywash365+ ceiling boom-Z with spring



The choice of perfection

Ideal for pre-washing:
Two inlets for different media.

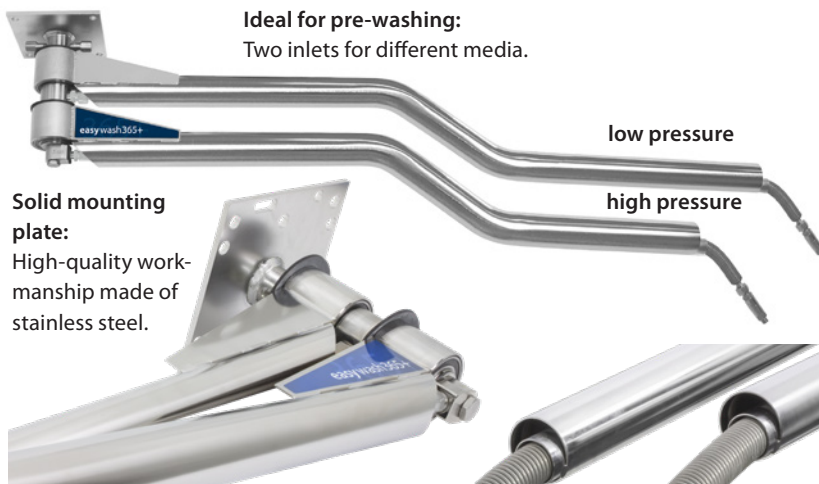

Solid mounting plate:
High-quality workmanship made of stainless steel.

Dual solution: We recommend using the top ceiling boom as the low pressure boom.

Outlets: 1/4" M



Strain relief and kink protection: Easy hose assembly and long service life for hoses thanks to the flexible, bendable spring.

Maintenance-free swivel joints: High-quality swivel joints on the axis and at the outlet ensure smooth swiveling.




www.rm-suttner.com

easywash365+ double ceiling boom Z



The choice of perfection

easywash365+ double ceiling boom Z

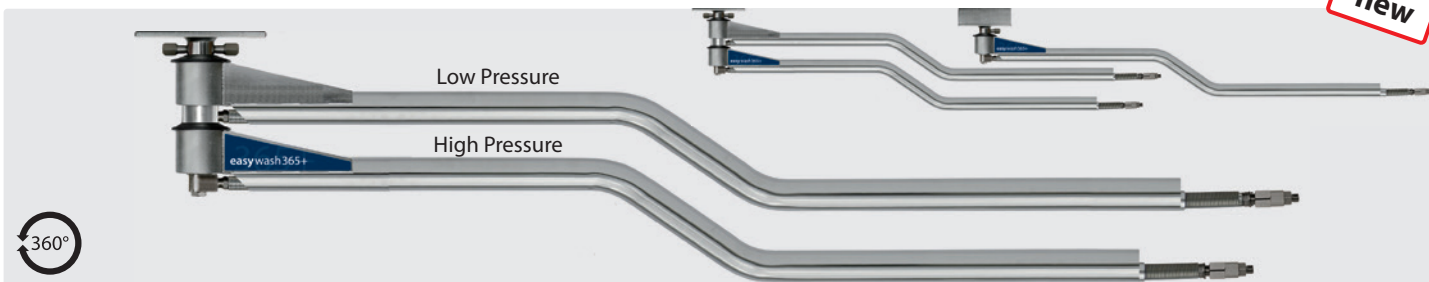

Stainless steel. Ready for installation with integrated quality swivel joints, professional high-pressure hose with strain relief spring and integrated hose stiffer. Axle has 2 bearings and is permanently lubricated. Especially suitable for the use of 2 ceiling booms next to each other and developed for 2 different media and applications. Max. 275 bar / 90 °C

R+M Nr.	↔	⊖	⊕	⊞
109 679 28	1,550 mm / 1,450 mm	1/4" F	1/4" M	16.0 kg

Assembly example for double ceiling boom-Z, ceiling boom-Z and ceiling boom-Z with spring

A = 4.600 mm
B = 900 mm
L = 1.550 mm

180

190

1 Ø 12
2 Ø 14
3 Ø 12 x 32


easywash365+ car wash ceiling boom-Z



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using two booms side by side. Max. 275 bar / 90 °C

R+M Nr.	↔	⊖	⊕	⊞
109 765 926	1,550 mm	1/4" F	1/4" M	8.0 kg

easywash365+ car wash ceiling boom-Z with spring

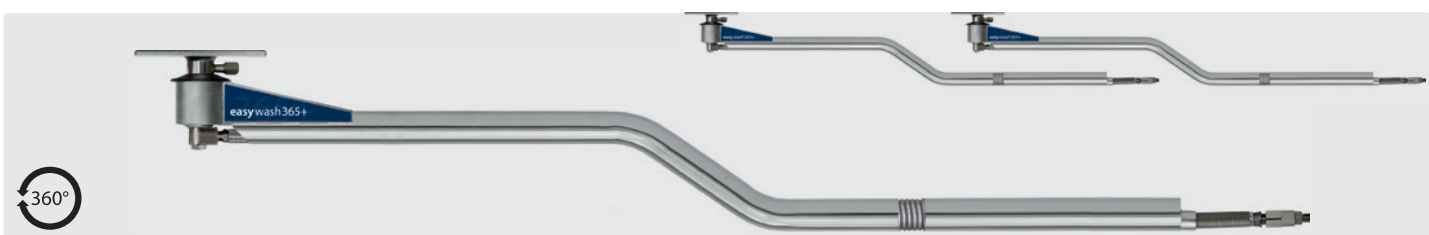

Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using two booms side by side. Max. 275 bar / 90 °C

R+M Nr.	↔	⊖	⊕	⊞
109 765 978	1,550 mm	1/4" F	1/4" M	8.0 kg