



# highest quality state of the art customized PRECISION OF THE ART TTL

## CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	Ø	3/4 BSP
	PRESS.	Min.	-0.1 bar - 1.5 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	74° C. 165° F.	
OUT	DIAMETER	Ø	3/8 BSP
SHAFT		Ø	24 mm
OIL	SAE 75W90	1.3 litri	0.34 U.S.G.
PESO WEIGHT	Kg lbs	14.2 / 31.2	



FLANGIA CON GIUNTO ELASTICO PER MOTORI IDRAULICI (vedi pag.76) BRIDE AVEC ACCOUPLEMENT ELASTIQUE POUR MOTEURS HYDRAULIQUES (voir pag 76)  
 BELL HOUSING + FLEXIBLE COUPLING FOR HYDRAULIC MOTORS (see page 76) BRIDA CON JUNTA ELÁSTICA PARA MOTORES HIDRÁULICOS (véase pág. 76)



### INTELLIseal™




Dx R B T

### OPTIONAL

F Sx G M

### INTELLIseal HW™

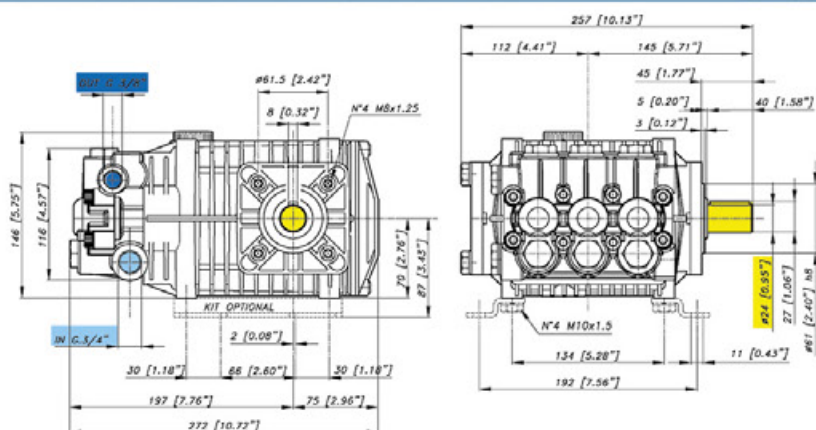

KIT PIEDINI cod. 05.9890.97.3 (optional)  
 MOUNTING RAILS KIT cod. 05.9890.97.3 (optional)  
 KIT SUPPORTS cod. 05.9890.97.3 (option)  
 JUEGO DE PIES cod. 05.9890.97.3 (opción)

## CARATTERISTICHE - FEATURES

## PERFORMANCE CHART

MODELLO MODEL CODICE PART NR.	MAX		PRESS		RPM 950				RPM 1450				RPM 1725				PIST. CORSA PLUNG. STROKE	
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP	Dia. mm	mm
TTL 1330 06.2041.97.3	15.3	4.0	200	2900	8.6	2.3	3.4	4.5	13.0	3.4	5.1	6.8	15.3	4.0	6.0	8.1	18	10
			250	3625	8.5	2.3	4.2	5.6	12.9	3.4	6.3	8.5	15.2	4.0	7.5	10.0		
			300	4350	8.5	2.2	5.0	6.7	12.9	3.4	7.6	10.2	15.1	4.0	8.9	12.0		
TTL 1530 06.2042.97.3	17.6	4.7	200	2900	9.9	2.6	3.9	5.2	15.0	4.0	5.9	7.9	17.6	4.7	6.9	9.3	18	14.4
			250	3625	9.8	2.6	4.8	6.5	14.9	3.9	7.3	9.8	17.5	4.6	8.6	11.5		
			300	4350	9.8	2.6	5.8	7.7	14.8	3.9	8.7	11.7	17.4	4.6	10.3	13.8		
TTL 1730 06.2043.97.3	20,1	5.3	200	2900	11.3	3.0	4.4	5.9	17.0	4.5	6.7	9.0	20.1	5.3	7.9	10.6	18	16.4
			250	3625	11.2	3.0	5.5	7.4	16.9	4.5	8.3	11.2	20.0	5.3	9.8	13.1		
			300	4350	11.2	2.9	6.6	8.8	16.9	4.5	9.9	13.3	19.9	5.2	11.7	15.7		
TTL 2030 06.2044.97.3	23.2	6.1	200	2900	13.1	3.4	5.1	6.9	19.7	5.2	7.7	10.4	23.2	6.1	9.1	12.2	18	19
			250	3625	13.0	3.4	6.4	8.6	19.6	5.2	9.6	12.9	23.1	6.1	11.4	15.2		
			300	4350	12.9	3.4	7.6	10.2	19.5	5.2	11.5	15.4	23.0	6.1	13.6	18.2		