


Suttner regulation valve ST-250



The choice of perfection

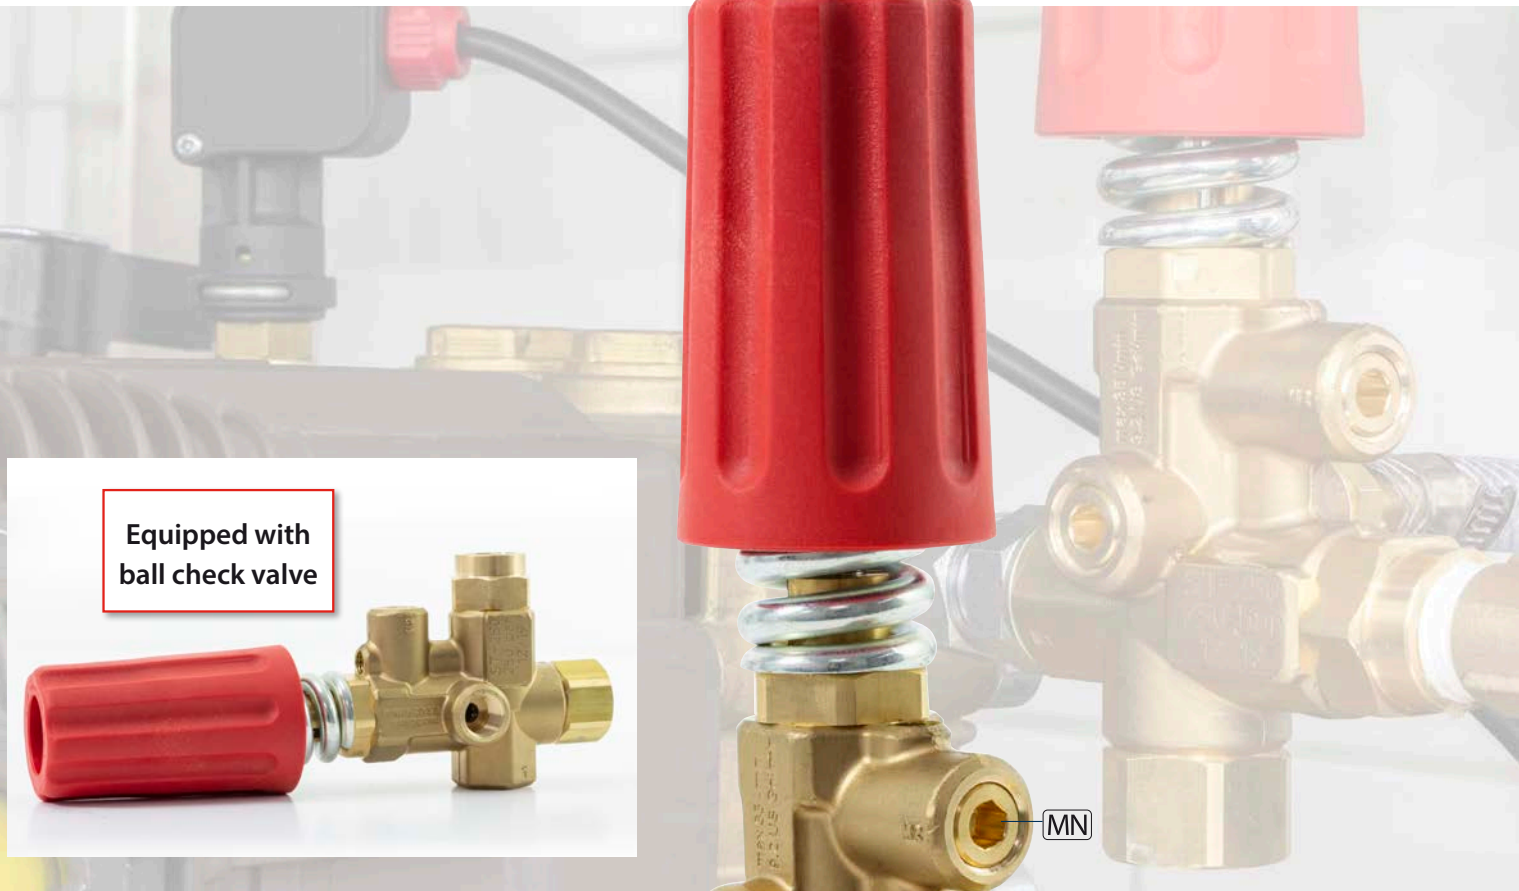


Equipped with ball check valve



Suttner regulation valve ST-250

- Inlet 3/8" F & outlet 3/8" F
- Connection for bypass & pressure gauge 1/4" F
- Max. pressure: 250 bar
- With ball check valve

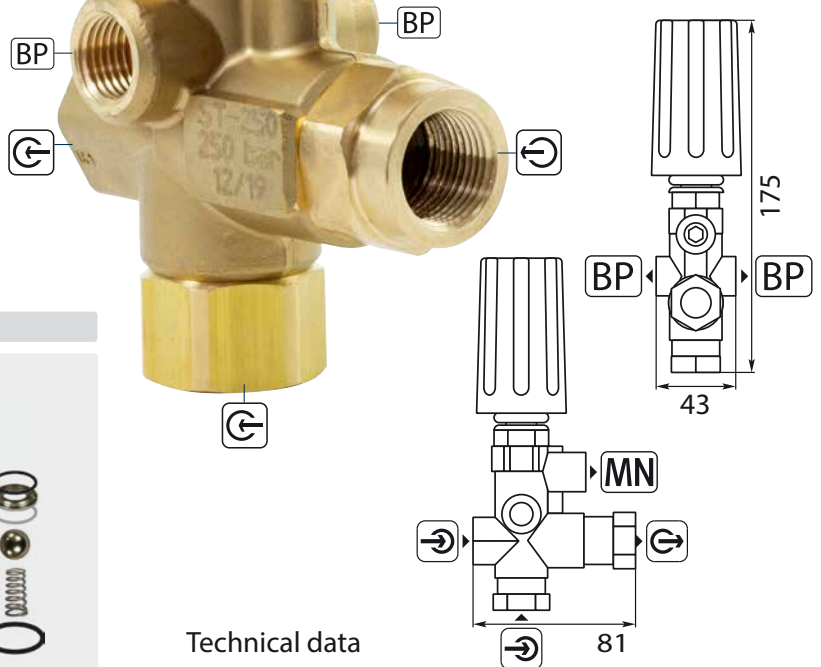

ST-250



☰ = inlet 3/8" F. ☱ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Ball check valve. Max. 250 bar / 80 °C

With ball check valve

R+M Nr.	☰	R+M Nr.
200 250 500	35 l/min	200 250 490

Technical data

max. pressure	250 bar
max. temperature	80 °C
inlet / outlet	3/8" F / 3/8" F
bypass	BP 1/4" F
pressure gauge	MN 1/4" F
flow	35 l / min

www.rm-suttner.com

Version: 02.04.2019