

Suttner unloader valve ST-265 with green spring



Solid «splint»:
Professional and robust
processing of the
pressure-intensive parts.



Specially shaped:
Innovative, flattened
spring contour.




**Equipped with
ball check valve**



Suttner unloader valve ST-265 with green spring and permissible working pressure up to 240 bar

- Soft switching behavior
- Fatigue-free spring
- Particularly easy to maintain
- Low pressure drop
- Valve elements made of high-grade stainless steel and ceramic

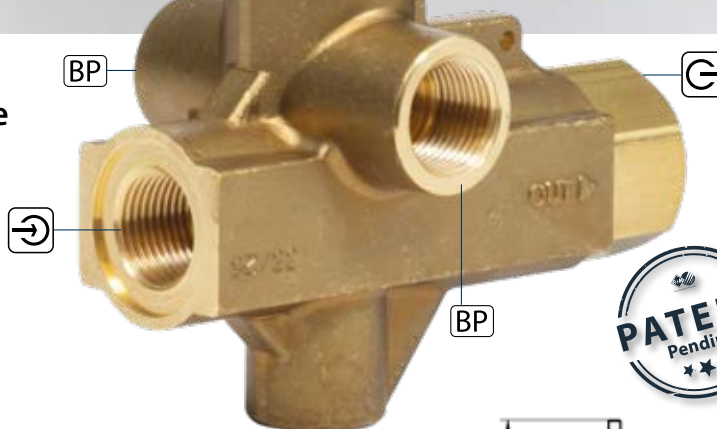

**Particularly
durable!
High-quality
combination
of materials**

ST-265 (green spring)



☞ = Inlet 3/8" F. ☞ = Outlet 3/8" F.
BP = Bypass 3/8" F. Check Valve with ball.
Max. 240 bar / 80 °C


R+M Nr.	☞
200 265 505	50 l/min

Hand grip



For ST-250, ST-265,
ST-275, ST-280, ST-285.
Grey. Ø 45 mm,
Height 76 mm

R+M Nr.
200 280 492

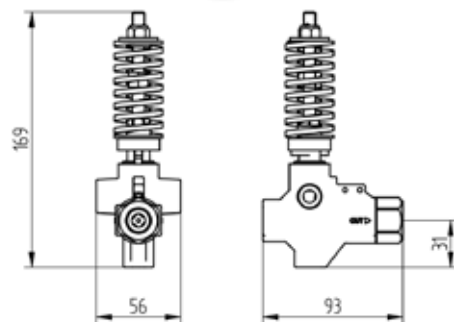

Technical data

max. pressure	240 bar
max. temperature	80 °C
inlet / outlet	3/8" F / 3/8" F
bypass	BP 3/8" F
flow	50 l/min


www.rm-suttner.com

Suttner unloader valve ST-265 with green spring and switch



Suttner unloader valve ST-265 with green spring and switch

- Maximum inrush current:
10 mA – 5 A (2 A)
- Voltage: 12 – 24 VDC, 12 – 250 VAC
- Protection class IP65
- Cable 1.2 meters 3 x AWG 20




Switch also for retrofitting: If you want to switch off the pump motor during breaks in operation, use the ST-265 with an attached switch. The attached pressure switch is a toggle switch for NC/NO signal.

ST-265 with switch (green spring)



☐ = Inlet 3/8" F. ☐ = Outlet 3/8" F.
BP = Bypass 3/8" F. Ball check valve.
Unloader valve with pressure switch (IP65)
and cable 1,200 mm. Max. 240 bar / 80 °C

R+M Nr.	
200 265 545	50 l/min

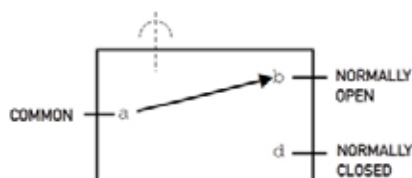

Repair / retrofit kit switch ST-265



Switch for Suttner unloader valve ST-265.
Protection class IP65.
Cable 1,200 mm, 3 x AWG 20.
Maximum inrush current: 10 mA – 5 A (2A)

R+M Nr.	
200 265 430	12 – 24 VDC, 12 – 250 VAC

www.rm-suttner.com