


# Suttner stainless steel unloader valve ST-275




The choice of perfection



**Solid «splint»:**  
Professional and robust processing of the pressure-intensive parts.



**Specially shaped:**  
Innovative, flattened spring contour.



## Suttner stainless steel unloader valve ST-275

- Smooth switching behavior
- All media-contacting parts made of stainless steel
- Pressure reduction in hose and gun in bypass operation to below 40% of the working pressure.
- The sealing system does not require any moving high-pressure soft seals and is characterized by a particularly long service life.
- High pressure connections suitable for sealing with bonded seals.
- Valve ball made of high-performance ceramic
- Switch can be retrofitted

• Handwheel cap  
ST-Universal  
grey (retrofitable)

### Handwheel cap retrofit kit

Handwheel cap, grey.  
Ø 45 mm, height 76 mm




### Technical data

R+M Nr.  
200 280 492

max. pressure	500 bar
max. temperature	90 °C
inlet / outlet	3/8" F / 1/2" F
bypass <b>BP</b>	3/8" F
flow	40 l/min



Only on request: Lid with private label.



Stainless steel design. Particularly durable!

ST-275



☉ = Inlet 3/8" F, ☉ = Outlet 1/2" F.

BP = Bypass 3/8" F. Valve ball made of high-performance ceramic. Max. 500 bar / 90 °C

R+M Nr.	200 275 500	40 l/min
---------	-------------	----------



www.rm-suttner.com

Version 0824


# Suttner stainless steel unloader valve ST-275 with switch



The choice of perfection




Also available with a switch

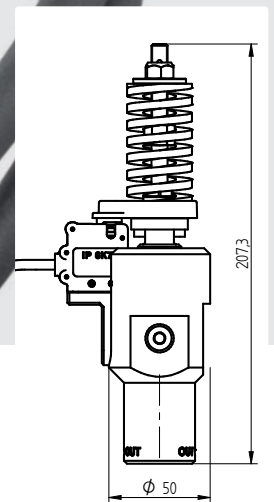

## Suttner stainless steel unloader valve ST-275 with switch

- Maximum inrush current: 10mA-5A(2A)
- Voltage: 12-24VDC, 12-250VAC
- Protection class IP65
- Cable 1.2 meters 3xAWG20




**Switch also for retrofitting:** If you want to switch off the pump motor during breaks in operation, use the ST-275 with an attached switch. The attached pressure switch is a toggle switch for NC/NO signal.

ST-275 with switch



☉ = Inlet 3/8" F. ☉ = Outlet 1/2" F.  
 BP = Bypass 3/8" F. nloader valve with pressure switch (IP65) and cable 1,200 mm.  
 Max. 500 bar / 90 °C

R+M Nr.	
200 275 550	40 l/min

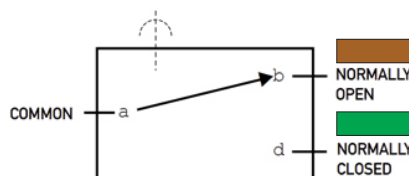

### Repair/retrofit kit switch ST-275



Switch for Suttner unloader valve ST-275.  
 Protection class IP65  
 Cable 1.200 mm, 3xAWG20.  
 Maximum inrush current: 10mA-5A(2A)

R+M Nr.	
200 265 430	12-24VDC, 12-250VAC

[www.rm-suttner.com](http://www.rm-suttner.com)