

CARWASH COMFORT and easywash365+ PREMIUM combinations



Ideal combinations
for the best
CARWASH PREMIUM
performance!



The new CARWASH COMFORT PREMIUM hose – unbeatable in combination with the ball-bearing easywash365+ guns!

- Extremely flexible and highly elastic high-pressure hose, thanks to special plastic composition.
- Maximum durability and flexibility for perfect car care.
- All easywash365+ guns and lance combinations, such as foam lances, washing brush sets or rinsing lances, are equipped with a high-quality ball-bearing swivel joint that is swivelling particularly smooth.
- With the proven Low Trigger Force technology for easy application.
- The new PREMIUM combinations are unique and incomparable.

TEST the BEST
Many combinations for the
CARWASH PREMIUM variants
from R+M / Suttner



Test and convince:
Most flexible hose, thanks to a special plastic combination and easywash365+ guns with the smooth-running ball-bearing swivel joint for the best handling in perfect car care.

CARWASH COMFORT and easywash365+ guns with the ball-bearing swivel joint in PREMIUM quality!

PREMIUM Carwash Solutions made in Germany: Color-coordinated quality products, convincing and long-lasting.

CARWASH COMFORT and easywash365+ PREMIUM combinations

easywash365+ guns with ball bearing swivel joints by Suttner

easywash365+ standard



LTF

Professional gun.
Standard.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 514	1/4" F	3/8" F swivel

easywash365+ weep



LTF

Professional gun.
Weep version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 524	1/4" F	3/8" F swivel

easywash365+ freeze stop




LTF

Professional gun.
Freeze stop version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 534	1/4" F	3/8" F swivel

easywash365+ lances by Suttner

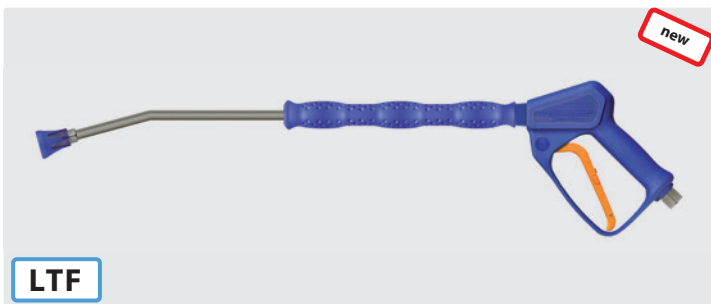

LTF

new

Lance with moulded handle Cool & Compact, easywash365+ spray gun and nozzle protector ST-10 without nozzle. Max. 310 bar / 150 °C

R+M Nr.	spray gun	ISO mm	⊖	⊕ mm	⊕
202 600 950 1	standard	300	1/4" F NPT	600	3/8" F swivel
202 600 966 1	weep	700	1/4" F NPT	900	3/8" F swivel
202 600 965 1	weep	300	1/4" F NPT	600	3/8" F swivel
202 600 980 1	freeze stop	300	1/4" F NPT	600	3/8" F swivel

CARWASH COMFORT PREMIUM



Female thread (DKR)

R+M Nr.	↔
466 052 133 5	3.5 m
466 052 133 7	3.7 m
466 052 134	4.0 m
466 052 134 2	4.2 m
466 052 134 5	4.5 m
466 052 134 7	4.7 m
466 052 135	5.0 m
466 052 135 5	5.5 m
466 052 136	6.0 m

Female thread (DKR)

R+M Nr.	↔
466 054 133 5	3.5 m
466 054 133 7	3.7 m
466 054 134	4.0 m
466 054 134 2	4.2 m
466 054 134 5	4.5 m
466 054 134 7	4.7 m
466 054 135	5.0 m
466 054 135 5	5.5 m
466 054 136	6.0 m

Female thread (DKOL)

R+M Nr.	↔
466 072 133 5	3.5 m
466 072 133 7	3.7 m
466 072 134	4.0 m
466 072 134 2	4.2 m
466 072 134 5	4.5 m
466 072 134 7	4.7 m
466 072 135	5.0 m
466 072 135 5	5.5 m
466 072 136	6.0 m

Female thread (DKOL)

R+M Nr.	↔
466 076 133 5	3.5 m
466 076 133 7	3.7 m
466 076 134	4.0 m
466 076 134 2	4.2 m
466 076 134 5	4.5 m
466 076 134 7	4.7 m
466 076 135	5.0 m
466 076 135 5	5.5 m
466 076 136	6.0 m

Male thread (AGR)

R+M Nr.	↔
466 044 133 5	3.5 m
466 044 133 7	3.7 m
466 044 134	4.0 m
466 044 134 2	4.2 m
466 044 134 5	4.5 m
466 044 134 7	4.7 m
466 044 135	5.0 m
466 044 135 5	5.5 m
466 044 136	6.0 m



new

Field of application: self-service washing bays. Roll at 200 m

R+M Nr.	TYP	DN	∅	P	BP	°C
300 160 6	orange	6	12.8	200 bar	>800 bar	-40 °C - +60 °C

Symbols DN nominal diameter ∅ diameter TYP type P pressure BP burst pressure °C temperature