




The choice of perfection



Everything for the professional foam application in the agricultural industry

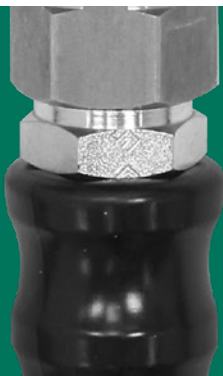

easyfoam 365+
easyfarm 365+

easyfoam365+ Everything for the professional foam application in the agricultural industry

Everything for the professional cot and machine cleaning!

True to the motto: Your requirements are our strengths!

Our new product line easyfarm365+ is especially designed for applications in the agriculture where high flow rates with ultra high pressures at the same time are used.

The high-quality spray device is characterized by ergonomic handling, high flexibility regarding

its use by means of the largely dimensioned quick coupling system KW and by a convincing durability.

easyfarm365+

Professional gun
202 620 660
Shop now:



LTF



LTF

Professional gun with coupling KW.
Max. 250 bar / 60 l/min / 150 °C

Professional gun.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.		
202 620 655	coupling KW	1/2" F swivel

R+M Nr.		
202 620 660	3/8" F	1/2" F swivel



LTF

1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun easyfarm365+, grip aside and nozzle protector made out of plastic without nozzle.
Max. 250 bar / 60 l/min / 100 °C

R+M Nr.		
200 078 530	nozzle protector without nozzle	1/2" F swivel




easyfoam365+ Everything for the professional foam application in the agricultural industry

easyfarm365+ high pressure hose for the agriculture




- » Especially developed for the use in the agriculture
- » For the professional cot and machine cleaning.
- » Considerably longer working life in comparison to common high pressure hoses
- » Ideal for the use on rough floors under hardest conditions
- » Transparent surface made out of thermoplastic elastomer

- » Oil-, UV-, ozone-resistant and weatherproof
- » Brass-plated wire braid for high stability
- » Excellent ease of use and high safety
- » -40 °C - +120 °C. -40 °F - +250 °F

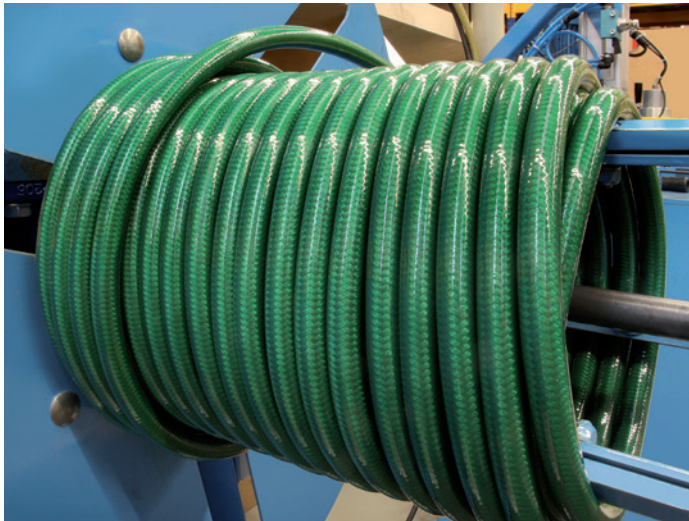


Smooth cover:
easy application on rough
floors under hardest conditions

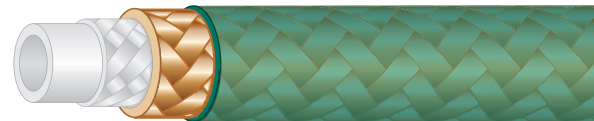

Composition: surface made out of thermoplastic elastomer, brass-plated wire braid, fabric braid and PES-interior

easyfarm365+ hoses with male threads (AGR)


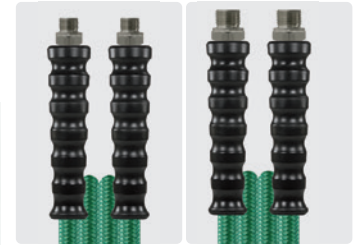


AGR : AGR
3/8" : 3/8"

AGR : AGR
1/2" : 1/2"

DN	pressure	°C	↔	R+M Nr.	R+M Nr.
12	275 bar	120 °C	20 m		363 201 463 20
			25 m		363 201 463 25
			20 m		363 201 463 30
			30 m		363 201 463 40
			40 m		363 201 463 50
10	275 bar	120 °C	50 m		363 201 463 60
			10 m	354 201 443 10	354 201 463 10
			15 m	354 201 443 15	354 201 463 15
			20 m	354 201 443 20	354 201 463 20
			25 m	354 201 443 25	354 201 463 25
8	275 bar	120 °C	30 m	354 201 443 30	354 201 463 30
			40 m	354 201 443 40	354 201 463 40
			10 m	348 201 443 10	
			15 m	348 201 443 15	
			20 m	348 201 443 20	
			25 m	348 201 443 25	
			30 m	348 201 443 30	
			40 m	348 201 443 40	



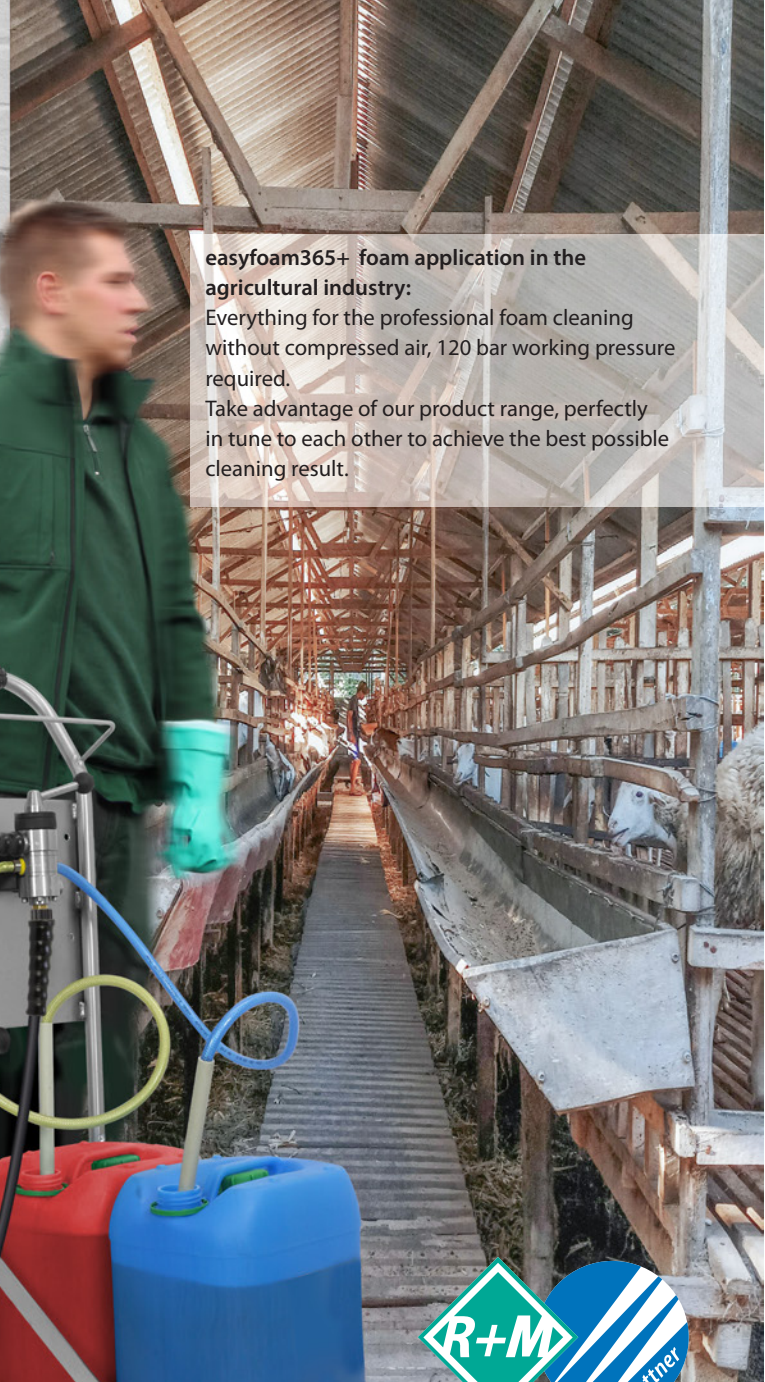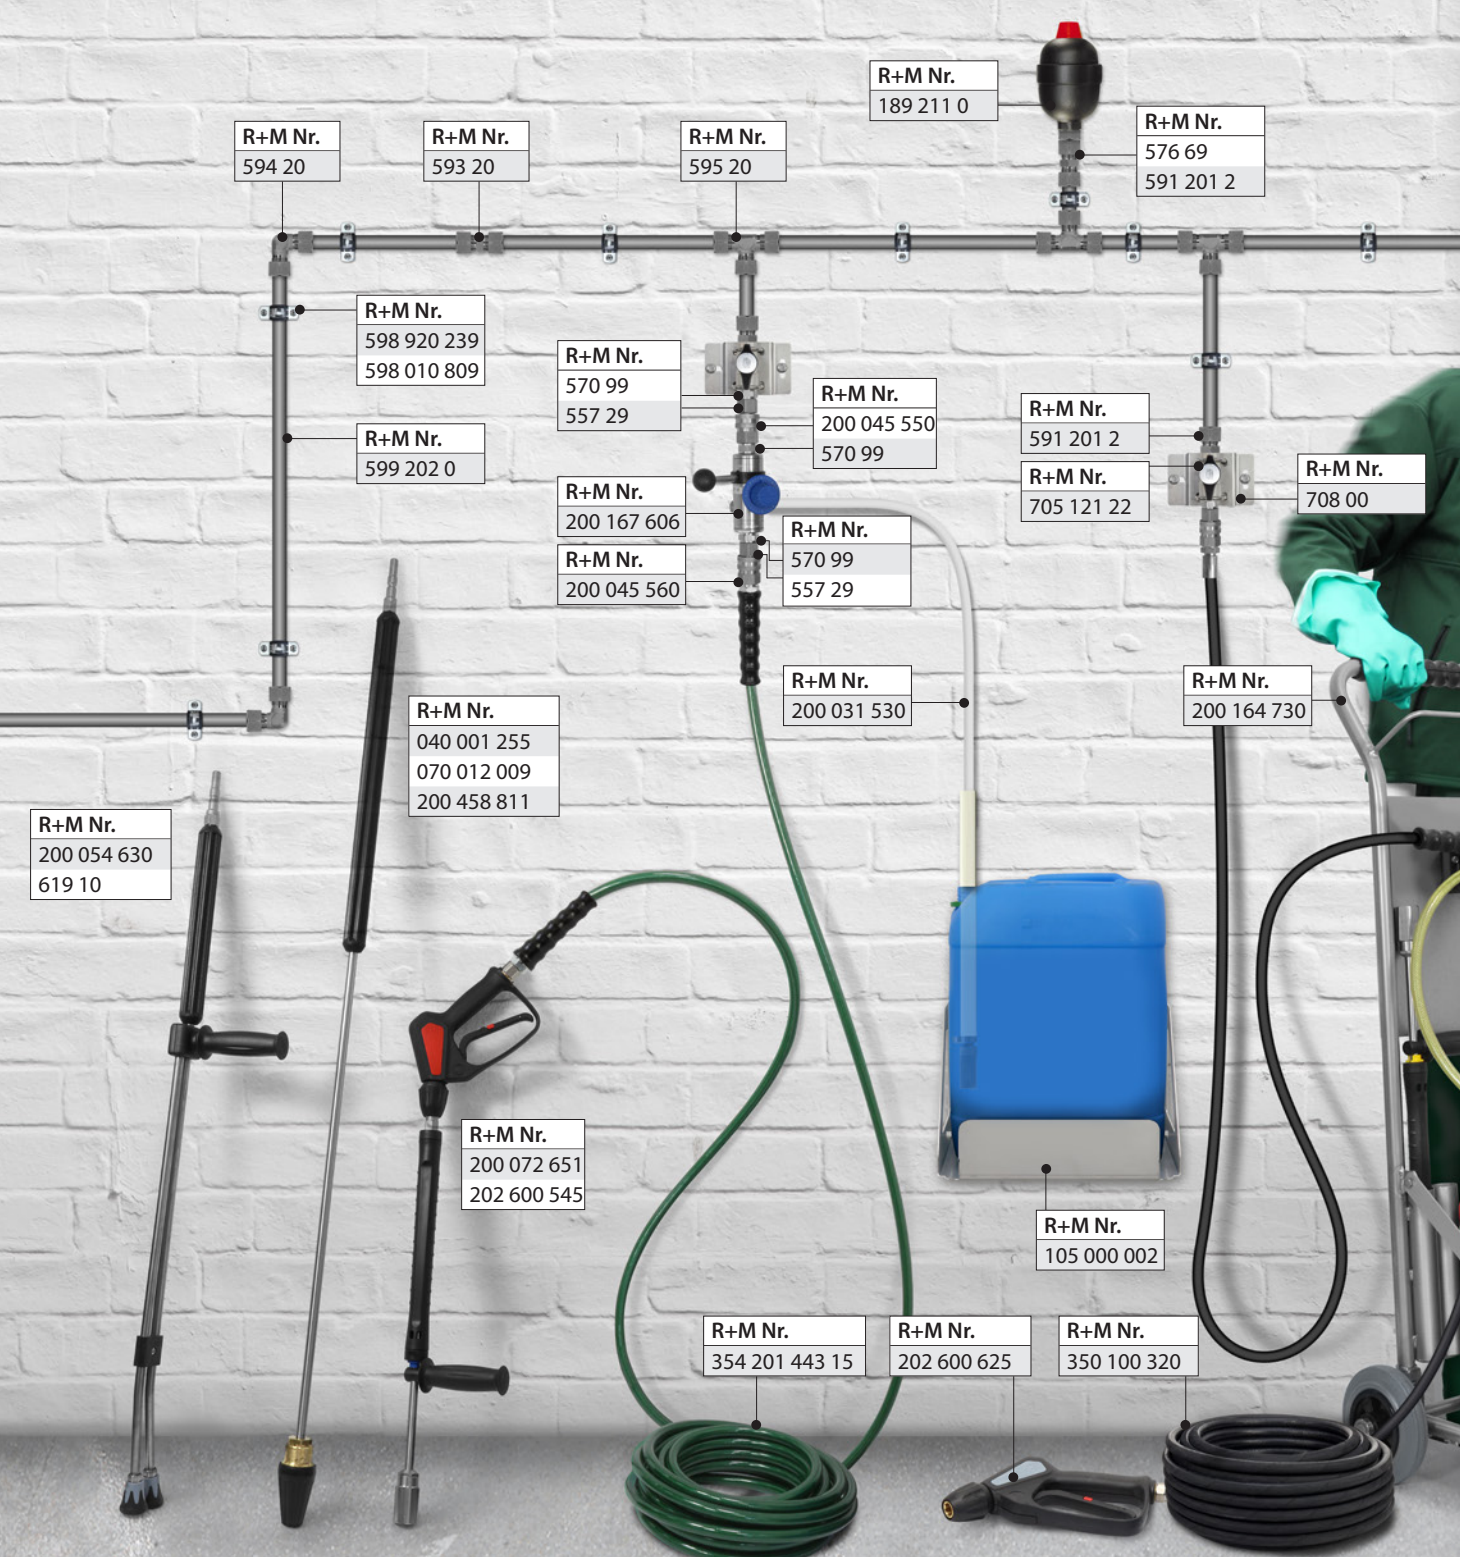

easyfoam365+ foam application in the agricultural industry:
 Everything for the professional foam cleaning without compressed air, 120 bar working pressure required.
 Take advantage of our product range, perfectly in tune to each other to achieve the best possible cleaning result.



The choice of perfection

easyfoam365+ Everything for the professional foam application in the agricultural industry



easyfoam365+ foam and disinfection units ST-164

The efficient **easyfoam365+** foam and disinfection unit is indispensable wherever frequent cleaning and disinfection is required. At the same time, it helps to ensure a high level of hygiene, with maximum flexibility and efficiency.

The foam and disinfection unit is used in particular for cleaning livestock or poultry farms and in food processing plants.

The mixing unit is a combination of stainless steel and special high-performance plastics. The shift lever determines the addition of one of two connected chemicals.

In its possible configuration, it is suitable for dosing in low pressure from approx. 4 bar up to a maximum of 350 bar. In the flushing position, up to 60 l/min. can pass through the injector unit almost without any loss in pressure.

Professional Gun

ST-2600: professional gun with patented LTF technology and coupling KW.
Max. 310 bar / 45 l/min / 150 °C




R+M Nr.
202 600 545

LTF

Motor pump combination Annovi Reverberi

Annovi Reverberi Typ
MTP HXW 30.15

R+M Nr.
170 260 60

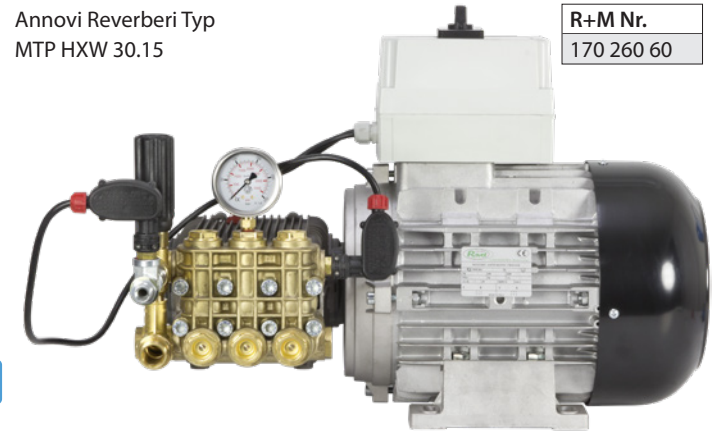

Twin lance easyfarm365+



Plug KW. Lance stainless steel, moulded handle 300 mm, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F.
Max. 310 bar / 150 °C



R+M Nr.	ISO	⊕	↔	Ⓢ
200 054 507	300 mm	1/4" IG NPT	980 mm	plug KW



You can see more applications here



Trolley with injector ST-164

The mobile stainless steel trolley is equipped with an injector and chemical suction hoses with a length of 1.5 meters and offers enough space on its base for 2 containers with a capacity of up to 25 kg each. We also supply a foam lance ST-72.1 and a 3 meter long inlet hose. Two lance holders on the sides are a welcome storage place for changing use of the lances. The cart is as easy to maneuver as a hand truck and has good tires so it can also be used on gap floors.

Injector
ST-164 < 21 l/min
complete Foam lance,
hose and trolley

Flow	R+M Nr.
< 21 l/min	200 164 731
> 21 l/min	200 164 730
> 30 l/min	200 164 732

Inlet: M22x1,5 F
Outlet: M22x1,5 M
Max. 350 bar / 100 °C



easyfoamer ST-73.2 foam injector lances

Our ST-73.2 foam injector lance ensures optimal air-cleaning agent mixing and thus an optimal foam result. Particularly suitable for high flow rates. There are five defined dosing positions on the corrosion-resistant injector, which is made entirely of stainless steel. The foam injector lance is characterized by its special chemical resistance and produces a vertical or horizontal spray pattern.



ST-73.2: Foam injector lance with 2 liter bottle and 1/4" female inlet.
Max. 300 bar / 80 °C

R+M Nr.	nozzle
200 073 906	1,50
200 073 916	1,80
200 073 956	2,10



Push & Pull lance

The peculiarity of the lance is that it is possible to adjust the inclination of the jet in relation to the axis of the lance itself. This allows the high-pressure jet to reach areas that would not be reachable with conventional high-pressure lances. In addition to a wide range of applica-

tions in the agricultural sector, the lance is also used to clean the underbody of vehicles.

Push & Pull: 1,000 mm, KW plug. Stainless steel lance, insulation ST-9 380 mm and nozzle protector ST-10 without nozzle. Max. 210 bar / 150 °C

R+M Nr.
200 085 603



Stepless adjustment 20-140°



Disinfection cold fogger ST-83.2

for versatile indoor use.

The finest active ingredient nebulization reaches even the smallest cracks and the last corner:

- A compressed air connection is required: Inlet pressure 3 bar, 200-400 l / min.
- Uniform spray pattern with the finest droplets under 30 µm.
- Extremely productive use: e.g. 2 liter for rooms with 120 m3, room size of approx. 50 m²
- Easy dosing of the disinfectant by ml scale, (100 ml each.)
- Accessories available: adapter for 5 - 30 liter canister, further dosing nozzles from our range



Application areas:

- disinfection
 - humidification / cooling
 - odor neutralization
 - pest control
 - dust deposition and mold removal
- for agriculture, breeding and animal husbandry, greenhouses, food industry, defense sector, etc.

R+M Nr.
200 083 550



Landwirtschaftsreiniger Big Wheel

- Fahrbarer Bodenreiniger mit Lanzenköcher für die Hochdrucklanze zur Extra-Reinigung in Ecken oder an Wänden.
- Robustes Edelstahl-Design mit Verstärkungen für härteste Einsatzbedingungen in der Landwirtschaft.
- Lenkrolle in 30 mm Breite, eignet sich optimal zum Fahren auf Spaltböden

R+M Nr.
521 052 900

easy farm 365+

