

Car Wash high-pressure hoses

CARWASH COMFORT PREMIUM



PREMIUM

TEST the BEST

Excellent sliding properties,
flexibility and durability!

CARWASH COMFORT PREMIUM – now even more flexible for use in self-service car washes

- Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound.
- Experience the new miracle in use, maximum durability and flexibility for perfect vehicle care.
- Highest resistance to oil, UV-, ozone- and weather-proof.
- Flexible in case of low temperatures:
-40 °C – +60 °C, -40 °F – +140 °F.
- High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- Outer diameter 12.8 mm at DN 6
- Burst pressure > 800 bar.


Quality from professionals for professionals:

After many tests and extensive research work, we have added an extremely bend-friendly and highly flexible hose to our program for use in the self-service washing area, thanks to a special plastic combination. This is unsurpassably smooth and a very good choice for handling in perfect vehicle care.

Test our new CARWASH COMFORT in new premium quality!



Version 10.25 / Subject to technical changes

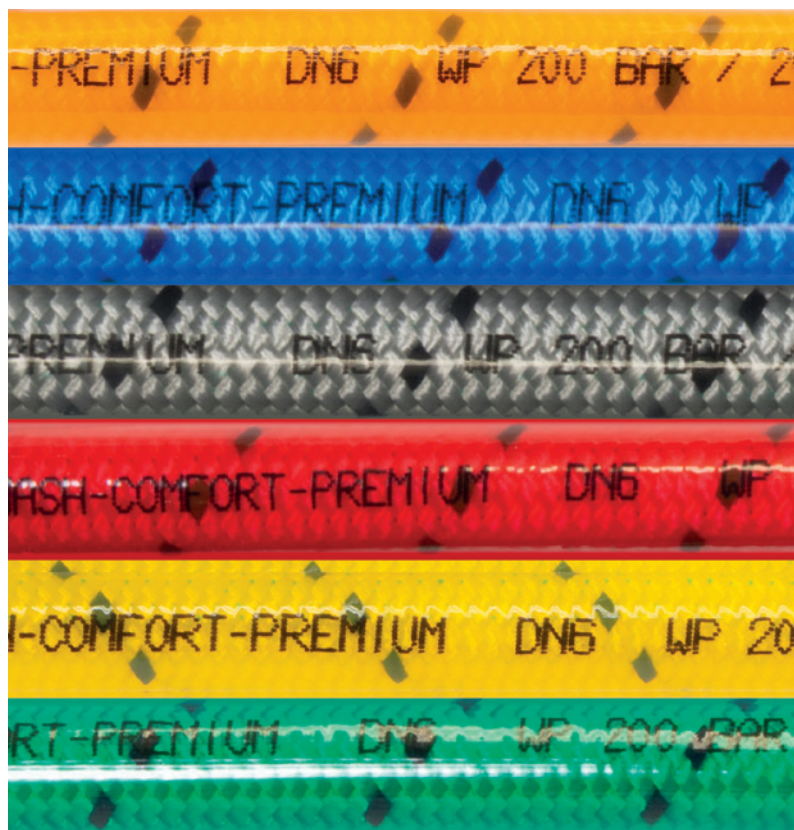

New colours: DN 6, now available in Blue, Grey, Red, Yellow and Green.

Our high-pressure car wash hoses are also available on rolls:



Smooth cover: clean and excellent gliding characteristic in combination with wetness.

CARWASH COMFORT PREMIUM. DN 6. Per metre




R+M Nr.	Colour
300 160 6	orange
300 100 61	blue
300 110 61	grey
300 120 61	red
300 150 61	yellow
300 140 61	green

Composition: PES, polyester and elastomer

www.rm-suttner.com

CARWASH COMFORT PREMIUM

- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound
- » For use in professional car cleaning
- » Highest resistance to oil, UV-, ozone- and weatherproof
- » Experience the new orange miracle in use, maximum durability and flexibility for perfect vehicle care
- » The solution in the self-service washing area for professionals by professionals
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F
- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12.8 mm at DN 6
- » Burst pressure > 800 bar

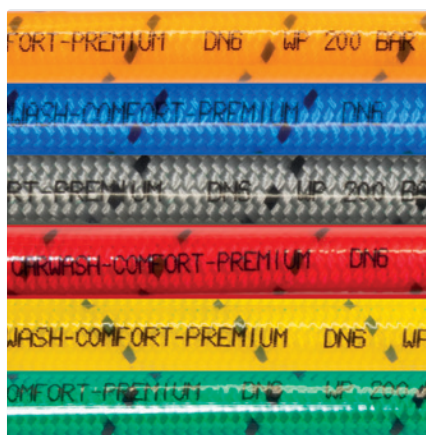

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔	
466 052 133 5	3.5 m	
466 052 133 7	3.7 m	
466 052 134	4.0 m	
466 052 134 2	4.2 m	
466 052 134 5	4.5 m	
466 052 134 7	4.7 m	
466 052 135	5.0 m	
466 052 135 5	5.5 m	
466 052 136	6.0 m	

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔	
466 054 133 5	3.5 m	
466 054 133 7	3.7 m	
466 054 134	4.0 m	
466 054 134 2	4.2 m	
466 054 134 5	4.5 m	
466 054 134 7	4.7 m	
466 054 135	5.0 m	
466 054 135 5	5.5 m	
466 054 136	6.0 m	

M14 : M14



Female thread (DKOL)

R+M Nr.	↔	
466 072 133 5	3.5 m	
466 072 133 7	3.7 m	
466 072 134	4.0 m	
466 072 134 2	4.2 m	
466 072 134 5	4.5 m	
466 072 134 7	4.7 m	
466 072 135	5.0 m	
466 072 135 5	5.5 m	
466 072 136	6.0 m	

M18 : M18



Female thread (DKOL)

R+M Nr.	↔	
466 076 133 5	3.5 m	
466 076 133 7	3.7 m	
466 076 134	4.0 m	
466 076 134 2	4.2 m	
466 076 134 5	4.5 m	
466 076 134 7	4.7 m	
466 076 135	5.0 m	
466 076 135 5	5.5 m	
466 076 136	6.0 m	

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔	
466 044 133 5	3.5 m	
466 044 133 7	3.7 m	
466 044 134	4.0 m	
466 044 134 2	4.2 m	
466 044 134 5	4.5 m	
466 044 134 7	4.7 m	
466 044 135	5.0 m	
466 044 135 5	5.5 m	
466 044 136	6.0 m	



R+M Nr.	↔	
461 105 260 35	3.5 m	
461 105 260 37	3.7 m	
461 105 260 4	4.0 m	
461 105 260 42	4.2 m	
461 105 260 45	4.5 m	
461 105 260 47	4.7 m	
461 105 260 5	5.0 m	
461 105 260 55	5.5 m	
461 105 260 6	6.0 m	



R+M Nr.	↔	
461 105 460 35	3.5 m	
461 105 460 37	3.7 m	
461 105 460 4	4.0 m	
461 105 460 42	4.2 m	
461 105 460 45	4.5 m	
461 105 460 47	4.7 m	
461 105 460 5	5.0 m	
461 105 460 55	5.5 m	
461 105 460 6	6.0 m	



R+M Nr.	↔	
461 107 260 35	3.5 m	
461 107 260 37	3.7 m	
461 107 260 4	4.0 m	
461 107 260 42	4.2 m	
461 107 260 45	4.5 m	
461 107 260 47	4.7 m	
461 107 260 5	5.0 m	
461 107 260 55	5.5 m	
461 107 260 6	6.0 m	



R+M Nr.	↔	
461 107 660 35	3.5 m	
461 107 660 37	3.7 m	
461 107 660 4	4.0 m	
461 107 660 42	4.2 m	
461 107 660 45	4.5 m	
461 107 660 47	4.7 m	
461 107 660 5	5.0 m	
461 107 660 55	5.5 m	
461 107 660 6	6.0 m	




R+M Nr.	↔	
461 104 460 35	3.5 m	
461 104 460 37	3.7 m	
461 104 460 4	4.0 m	
461 104 460 42	4.2 m	
461 104 460 45	4.5 m	
461 104 460 47	4.7 m	
461 104 460 5	5.0 m	
461 104 460 55	5.5 m	
461 104 460 6	6.0 m	

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbole ↔ Länge

CARWASH COMFORT PREMIUM


1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
462 105 230 35	3.5 m
462 105 230 37	3.7 m
462 105 230 4	4.0 m
462 105 230 42	4.2 m
462 105 230 45	4.5 m
462 105 230 47	4.7 m
462 105 230 5	5.0 m
462 105 230 55	5.5 m
462 105 230 6	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
462 105 430 35	3.5 m
462 105 430 37	3.7 m
462 105 430 4	4.0 m
462 105 430 42	4.2 m
462 105 430 45	4.5 m
462 105 430 47	4.7 m
462 105 430 5	5.0 m
462 105 430 55	5.5 m
462 105 430 6	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
462 107 230 35	3.5 m
462 107 230 37	3.7 m
462 107 230 4	4.0 m
462 107 230 42	4.2 m
462 107 230 45	4.5 m
462 107 230 47	4.7 m
462 107 230 5	5.0 m
462 107 230 55	5.5 m
462 107 230 6	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
462 107 630 35	3.5 m
462 107 630 37	3.7 m
462 107 630 4	4.0 m
462 107 630 42	4.2 m
462 107 630 45	4.5 m
462 107 630 47	4.7 m
462 107 630 5	5.0 m
462 107 630 55	5.5 m
462 107 630 6	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
462 104 430 35	3.5 m
462 104 430 37	3.7 m
462 104 430 4	4.0 m
462 104 430 42	4.2 m
462 104 430 45	4.5 m
462 104 430 47	4.7 m
462 104 430 5	5.0 m
462 104 430 55	5.5 m
462 104 430 6	6.0 m



R+M Nr.	
463 105 270 35	3.5 m
463 105 270 37	3.7 m
463 105 270 4	4.0 m
463 105 270 42	4.2 m
463 105 270 45	4.5 m
463 105 270 47	4.7 m
463 105 270 5	5.0 m
463 105 270 55	5.5 m
463 105 270 6	6.0 m



R+M Nr.	
463 105 470 35	3.5 m
463 105 470 37	3.7 m
463 105 470 4	4.0 m
463 105 470 42	4.2 m
463 105 470 45	4.5 m
463 105 470 47	4.7 m
463 105 470 5	5.0 m
463 105 470 55	5.5 m
463 105 470 6	6.0 m



R+M Nr.	
463 107 270 35	3.5 m
463 107 270 37	3.7 m
463 107 270 4	4.0 m
463 107 270 42	4.2 m
463 107 270 45	4.5 m
463 107 270 47	4.7 m
463 107 270 5	5.0 m
463 107 270 55	5.5 m
463 107 270 6	6.0 m



R+M Nr.	
463 107 670 35	3.5 m
463 107 670 37	3.7 m
463 107 670 4	4.0 m
463 107 670 42	4.2 m
463 107 670 45	4.5 m
463 107 670 47	4.7 m
463 107 670 5	5.0 m
463 107 670 55	5.5 m
463 107 670 6	6.0 m



R+M Nr.	
463 104 470 35	3.5 m
463 104 470 37	3.7 m
463 104 470 4	4.0 m
463 104 470 42	4.2 m
463 104 470 45	4.5 m
463 104 470 47	4.7 m
463 104 470 5	5.0 m
463 104 470 55	5.5 m
463 104 470 6	6.0 m



R+M Nr.	
464 105 230 35	3.5 m
464 105 230 37	3.7 m
464 105 230 4	4.0 m
464 105 230 42	4.2 m
464 105 230 45	4.5 m
464 105 230 47	4.7 m
464 105 230 5	5.0 m
464 105 230 55	5.5 m
464 105 230 6	6.0 m



R+M Nr.	
464 105 430 35	3.5 m
464 105 430 37	3.7 m
464 105 430 4	4.0 m
464 105 430 42	4.2 m
464 105 430 45	4.5 m
464 105 430 47	4.7 m
464 105 430 5	5.0 m
464 105 430 55	5.5 m
464 105 430 6	6.0 m



R+M Nr.	
464 107 230 35	3.5 m
464 107 230 37	3.7 m
464 107 230 4	4.0 m
464 107 230 42	4.2 m
464 107 230 45	4.5 m
464 107 230 47	4.7 m
464 107 230 5	5.0 m
464 107 230 55	5.5 m
464 107 230 6	6.0 m



R+M Nr.	
464 107 630 35	3.5 m
464 107 630 37	3.7 m
464 107 630 4	4.0 m
464 107 630 42	4.2 m
464 107 630 45	4.5 m
464 107 630 47	4.7 m
464 107 630 5	5.0 m
464 107 630 55	5.5 m
464 107 630 6	6.0 m



R+M Nr.	
464 104 430 35	3.5 m
464 104 430 37	3.7 m
464 104 430 4	4.0 m
464 104 430 42	4.2 m
464 104 430 45	4.5 m
464 104 430 47	4.7 m
464 104 430 5	5.0 m
464 104 430 55	5.5 m
464 104 430 6	6.0 m

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols length

CARWASH COMFORT PREMIUM

1/4" : 1/4"



Female thread (DKR)

3/8" : 3/8"



Female thread (DKR)

M14 : M14



Female thread (DKOL)

M18 : M18



Female thread (DKOL)

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
465 105 230 35	3.5 m
465 105 230 37	3.7 m
465 105 230 4	4.0 m
465 105 230 42	4.2 m
465 105 230 45	4.5 m
465 105 230 47	4.7 m
465 105 230 5	5.0 m
465 105 230 55	5.5 m
465 105 230 6	6.0 m

R+M Nr.	
465 105 430 35	3.5 m
465 105 430 37	3.7 m
465 105 430 4	4.0 m
465 105 430 42	4.2 m
465 105 430 45	4.5 m
465 105 430 47	4.7 m
465 105 430 5	5.0 m
465 105 430 55	5.5 m
465 105 430 6	6.0 m

R+M Nr.	
465 107 230 35	3.5 m
465 107 230 37	3.7 m
465 107 230 4	4.0 m
465 107 230 42	4.2 m
465 107 230 45	4.5 m
465 107 230 47	4.7 m
465 107 230 5	5.0 m
465 107 230 55	5.5 m
465 107 230 6	6.0 m


R+M Nr.	
465 107 630 35	3.5 m
465 107 630 37	3.7 m
465 107 630 4	4.0 m
465 107 630 42	4.2 m
465 107 630 45	4.5 m
465 107 630 47	4.7 m
465 107 630 5	5.0 m
465 107 630 55	5.5 m
465 107 630 6	6.0 m

R+M Nr.	
465 104 430 35	3.5 m
465 104 430 37	3.7 m
465 104 430 4	4.0 m
465 104 430 42	4.2 m
465 104 430 45	4.5 m
465 104 430 47	4.7 m
465 104 430 5	5.0 m
465 104 430 55	5.5 m
465 104 430 6	6.0 m

New

High pressure hoses per metre

CARWASH COMFORT PREMIUM

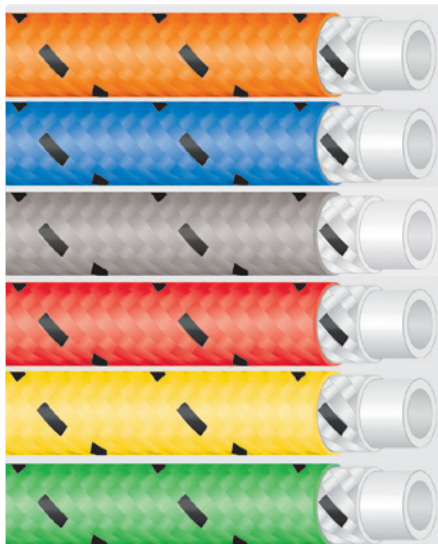

- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound.
- » For use in professional car cleaning.
- » Highest resistance to oil, UV-, ozone- and weatherproof.
- » Experience the new orange miracle in use,

maximum durability and flexibility for perfect vehicle care.

- » The solution in the self-service washing area for professionals by professionals.
- » Roll at 200 m

Field of application: self-service washing bays

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 160 6	orange	6	12.8	200 bar	>800 bar	-40 °C – +60 °C
300 100 61	blue	6	12.8	200 bar	>800 bar	-40 °C – +60 °C
300 110 61	grey	6	12.8	200 bar	>800 bar	-40 °C – +60 °C
300 120 61	red	6	12.8	200 bar	>800 bar	-40 °C – +60 °C
300 150 61	yellow	6	12.8	200 bar	>800 bar	-40 °C – +60 °C
300 140 61	green	6	12.8	200 bar	>800 bar	-40 °C – +60 °C

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbol DN Nennweite Ø Durchmesser TYP Typ P Druck BP Berstdruck °C Temperatur