

turbodevil

wall cleaner WW 301



The choice of perfection

made
in
GERMANY



2 different versions available:
brush strips or rubber lip



flexible: the angle of the fork is variable.




low vibration: balanced rotor arm in a robust quality.

The turbodevil wall cleaner for professional cleaning applications

- high-quality stainless steel version
- working width 300 mm
- 2 nozzles 1/4" M BSP are required
- precisely calculated spraying angle for a best possible extensive cleaning with 500-750 l/h at 5 - 90 °C
- Max. temperature: 90 °C
- Max. pressure: 200 bar

splash guard: safe handling by means of an all-round rubber lip or brush strips

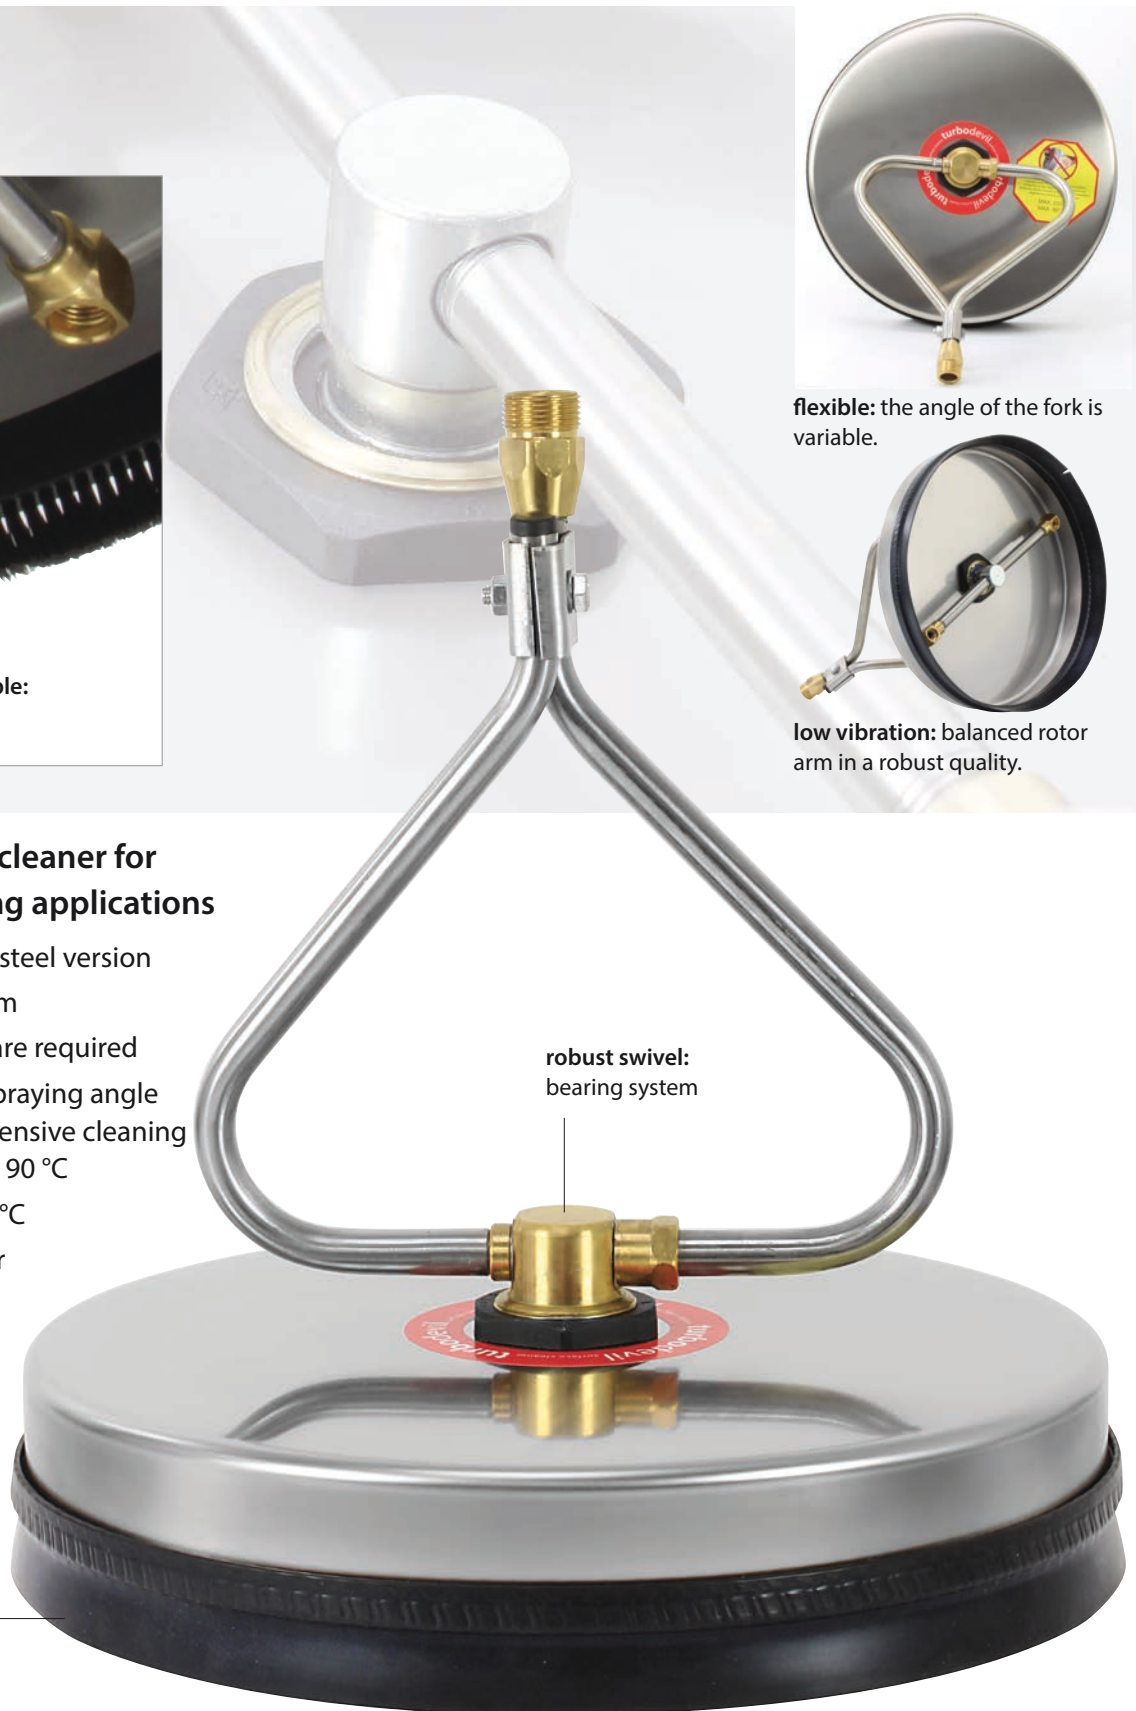

robust swivel:
bearing system

R+M Nr.	units / pallet	type	working width ø	inlet	outlet	pressure	temperature	weight
521 032 251	48	rubber lip	300 mm	M 22 M	2 x 1/4" F	max. 200 bar	90 °C	2.7 kg
521 032 254	48	brush strips	300 mm	M 22 M	2 x 1/4" F	max. 200 bar	90 °C	2.7 kg