


# R+M / Suttner high-pressure telescopic lances



The choice of perfection



**ST-602**  
High-pressure gun with integrated pole holder



**Novelty from R+M / Suttner**

**New professional telescopic lances with integrated high-pressure gun ST-602 and internal high-pressure hose for easy cleaning of hard-to-reach areas, e.g. ceilings, facades**

- Infinitely extendable, depending on the version from 2.45 to 7.8 m.
- Optionally available: strap for optimal hold.
- 530 mm long soft handle for a good grip.
- Connection 1/4" M with stainless steel extension 150 mm, nozzle guard ST-10 1/4" F NPT or nozzle guard without tip nozzle, both with angled stainless steel extension 250 mm.



**Firm grip:**  
A strap for even more safety is available as an option (R+M no. 525 920).

**Soft Grip:** Non-slip foam material surrounds the telescoping tube for a comfortable grip and insulation.



**Without scaffolding:** Easy cleaning at great heights with the high-pressure telescopic spray lance.

## Technical specifications

Max. pressure	275 bar
Max. temperature	100 °C
Length of grip element	530 mm
Outlet*	Nozzle protector / ST-10 / 1/4" M
Inlet	3/8" F / M22 M
Telescopic lance	Aluminum / fiberglass / stainless steel extension

\*without nozzle tip, HP nozzle



**Easy to pull out:** Lockable, ribbed elements make it easier to turn, even when wet.

# R+M / Suttner high-pressure telescopic lances



The choice of perfection

## R+M / Suttner high-pressure telescopic lances

- » Light and handy.  
Infinitely extendable.
- » Lance with internal high-pressure hose and mounted Suttner spray gun ST-602.  
Lance is delivered without high-pressure nozzles / tip nozzles.
- » Max. 275 bar / 100 °C

Safe handling thanks to the integrated pole holder on the ST-602 spray gun and long soft handle for a comfortable hold with insulation.



Nozzle guard without nozzle tip with angled extension tube



Nozzle protector ST-10 / 1/4" F NPT with extension tube angled




1/4" M with extension tube; Length 150 mm




R+M Nr.	⊞	M	⊖	↔	⊕
525 087 105	2.8 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 3.80 m	M22 M
525 087 110	2.8 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 3.80 m	3/8" F
525 087 115	2.7 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 3.70 m	3/8" F



R+M Nr.	⊞	M	⊖	↔	⊕
525 087 205	3.4 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 5.75 m	M22 M
525 087 210	3.4 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 5.75 m	3/8" F
525 087 215	3.3 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 5.65 m	3/8" F

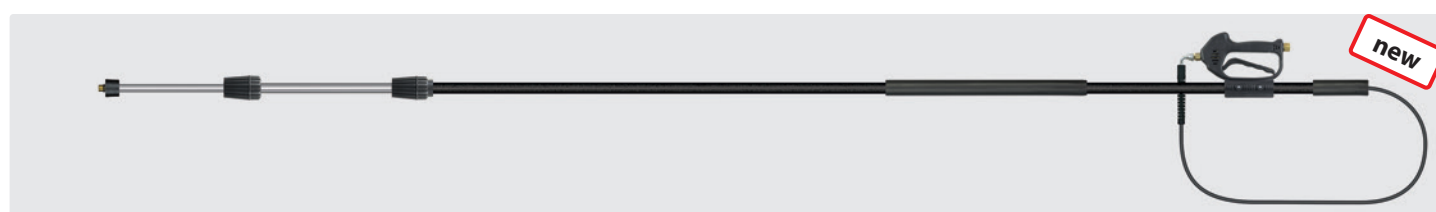

R+M Nr.	⊞	M	⊖	↔	⊕
525 087 305	4.1 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	3.20 - 7.80 m	M22 M
525 087 310	4.1 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.80 m	3/8" F
525 087 315	4.0 kg	Aluminum / Fiberglass	1/4" M with extension	3.10 - 7.70 m	3/8" F

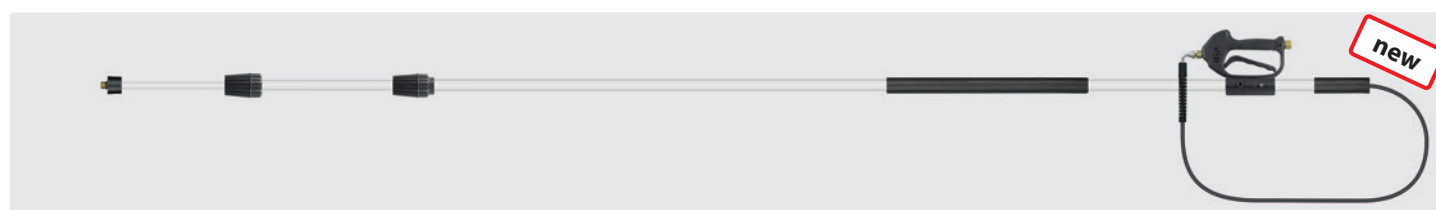

R+M Nr.	⊞	M	⊖	↔	⊕
525 087 405	4.0 kg	Aluminum	Nozzle protector without tip nozzle with angled extension	3.20 - 7.55 m	M22 M
525 087 410	4.0 kg	Aluminium	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.55 m	3/8" F
525 087 415	3.9 kg	Aluminium	1/4" M with extension	3.10 - 7.45 m	3/8" F

Symbole ⊖ Outlet ⊕ Inlet ↔ Length ⊞ Weight 🚚 shipment by truck M Material