

turbodevil

wall cleaner WW 160



The choice of perfection



clean solution: the integrated screen filter prevents that the nozzles get dirty




low vibration: balanced rotor arm in robust quality




The turbodevil wall cleaner WW 160 with an extra small action radius

- high-quality stainless steel version
- working width 160 mm
- 2 nozzles 1/4" M BSP are required
- precisely calculated spraying angle for a best possible extensive cleaning at 5-90 °C
- max. temperature: 90 °C
- max. pressure: 350 bar



robust swivel: bearing system

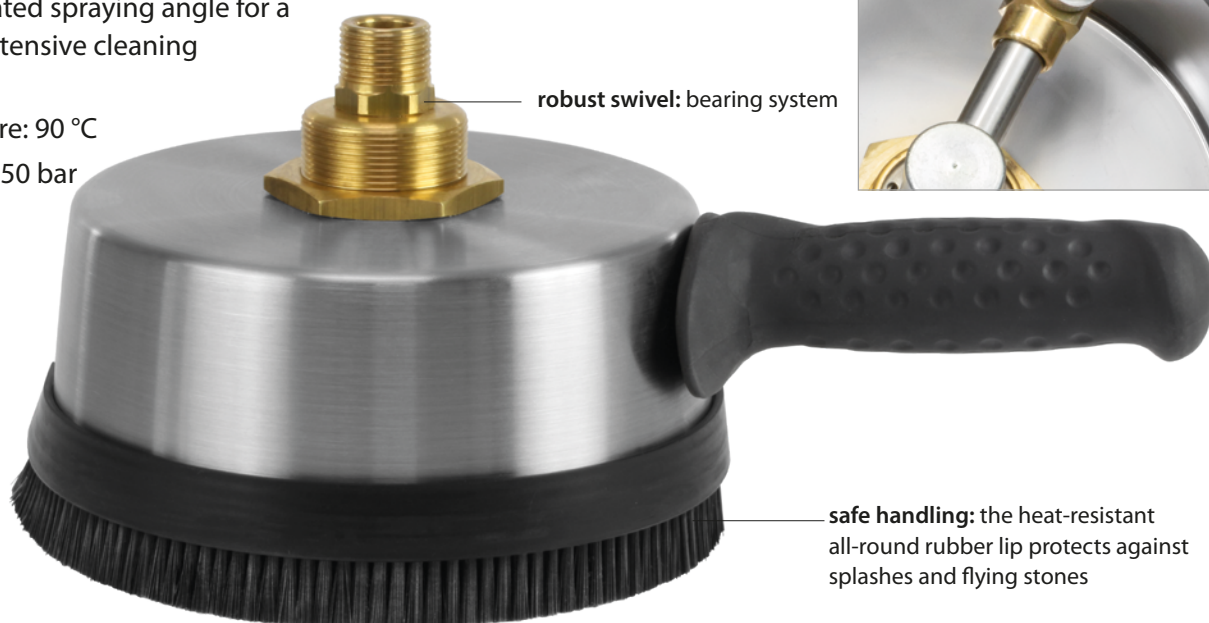

safe handling: the heat-resistant all-round rubber lip protects against splashes and flying stones



www.rm-suttner.com

R+M Nr.	units / carton	inlet	outlet	pressure	temperature	weight
710 100 160	13	M 22 M	2 x 1/4" F	max. 350 bar	90 °C	1.3 kg