


Product Description



PRODUCT NO.: 649090216060


SEWER NOZZLE 20° 1/4" F 1XF; 6XR 060

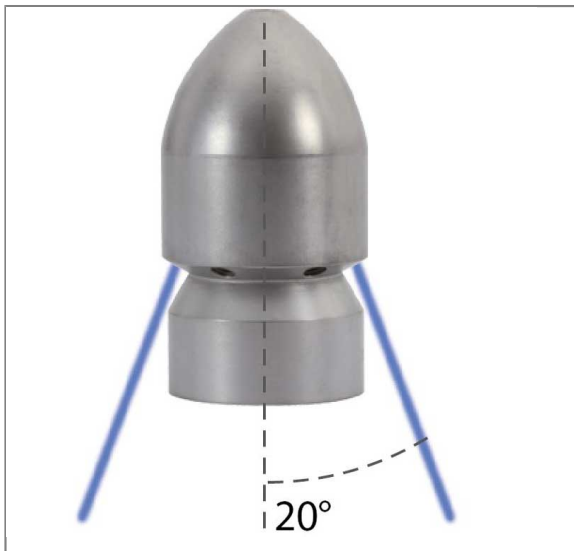

Inlet: 1/4" F
Nozzle 060
Outside diameter 25 mm
Rear jets 6
Front jet 1
Angle of jet 20°
Max. 500 bar / 150°C
Material: Wear-resistant, hardened stainless steel

Applications:
Suitable for removal of sludge deposits
Desilting of pipes
Opening of frozen pipelines

Made out of wear-resistant, hardened stainless steel provided with front jet insert or blind plug (interchangeable). Angle of jet is 20°, sturdy wall thickness, long service life and a minimum of wear and tear. All nozzles are provided with hardened stainless steel inserts. Due to this feature the efficiency is considerably higher compared with those nozzles with drilled holes and the service life is several times longer.

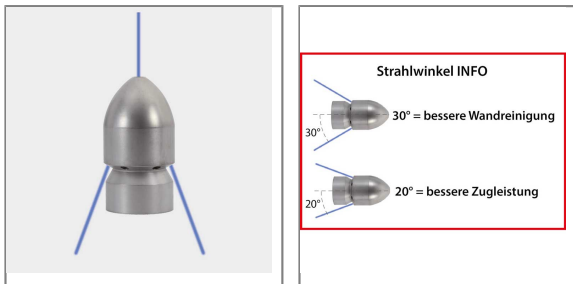

Technical data

Außendurchmesser	25 mm	Druck	500 bar
Düse	060	Eingang	1/4" IG
Hersteller	Suttner	Material	Edelstahl
Serie	ST-49	Sprühwinkel	20°
Temperatur	150°C		