


PRODUCT NO.: 58612102

SCREW CONNECTOR M16X1,5F/3/8"M

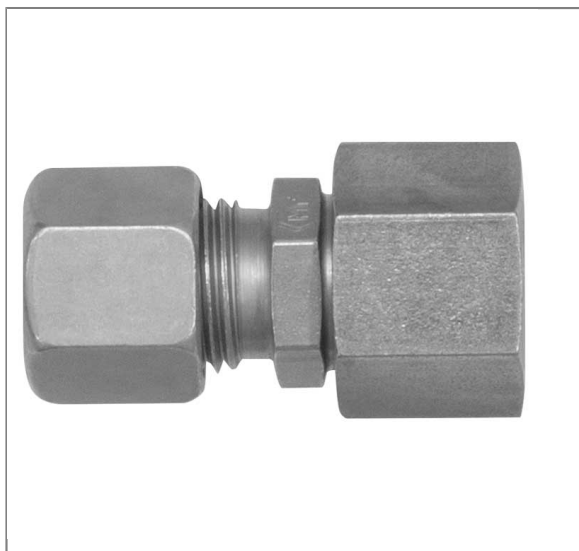

Einstellbare Reduzierverschraubung

24° DIN Compression pipe couplings

Straight reducer with 24° DKO swivel and 24° cone end

Pipe diameter 1: 12 mm

Pipe diameter 2: 10 mm

Length: 42 mm

Type REDV, cone 24°


Whitworth pipe thread

Material: Zinc-nickel coating

Which operating pressure for stainless steel?

Light series: L

Nominal pressure acc. to DIN 2401 -> 400 bar



The optimised zinc-nickel coating has demonstrated values in excess of 1,200 hours corrosion protection against white rust during testing in accordance with DIN EN ISO 9227.

Technical data

Connection 1	12 mm	Connection 2	10 mm
Length	42 mm	Material	Galvanised steel
Pressure	400 bar	Series	RED
Temperature	150°C	Type	L