


PRODUCT NO.: 58615122

SCREW CONNECTOR M16X1,5F/3/8"M

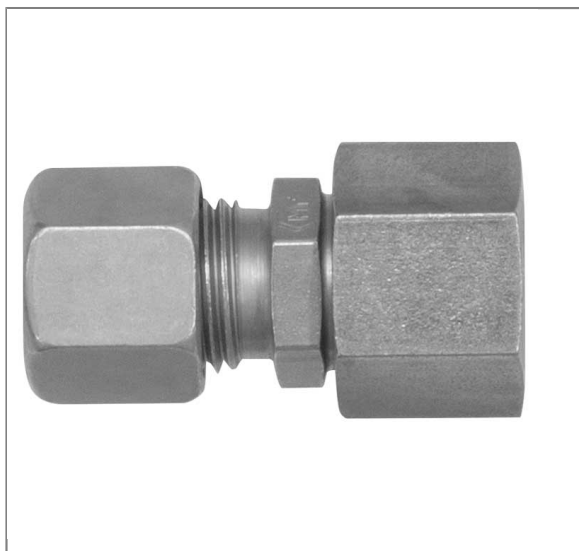

Einstellbare Reduzierverschraubung

24° DIN Compression pipe couplings

Straight reducer with 24° DKO swivel and 24° cone end

Pipe diameter 1: 15 mm

Pipe diameter 2: 12 mm

Length: 47 mm

Type REDV, cone 24°


Whitworth pipe thread

Material: Zinc-nickel coating

Which operating pressure for stainless steel?

Light series: L

Nominal pressure acc. to DIN 2401 -> 400 bar



The optimised zinc-nickel coating has demonstrated values in excess of 1,200 hours corrosion protection against white rust during testing in accordance with DIN EN ISO 9227.

Technical data

Connection 1	15 mm	Connection 2	12 mm
Length	47 mm	Material	Galvanised steel
Pressure	400 bar	Series	RED
Temperature	150°C	Type	L