


PRODUCT NO.: 58616122

## SCREW CONNECTOR M16X1,5F/3/8"M

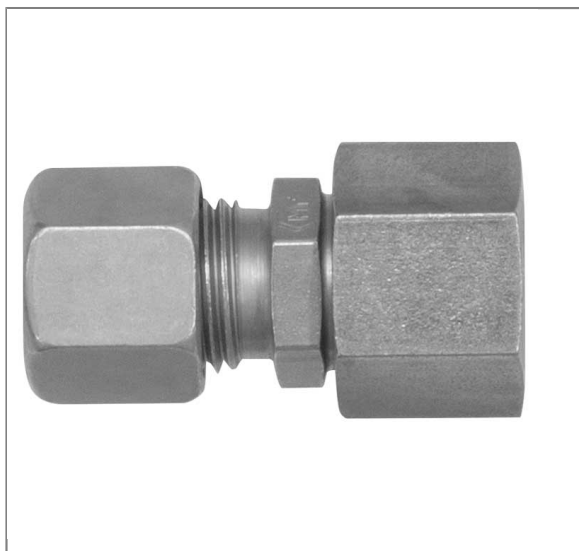

Einstellbare Reduzierverschraubung

24° DIN Compression pipe couplings

Straight reducer with 24° DKO swivel and 24° cone end

Pipe diameter 1: 16 mm

Pipe diameter 2: 12 mm

Length: 49 mm

Type REDV, cone 24°


Whitworth pipe thread

Material: Zinc-nickel coating

Which operating pressure for stainless steel?

Light series: S

Nominal pressure acc. to DIN 2401 -> 630 bar



The optimised zinc-nickel coating has demonstrated values in excess of 1,200 hours corrosion protection against white rust during testing in accordance with DIN EN ISO 9227.

### Technical data

|              |         |              |                  |
|--------------|---------|--------------|------------------|
| Connection 1 | 16 mm   | Connection 2 | 12 mm            |
| Length       | 49 mm   | Material     | Galvanised steel |
| Pressure     | 630 bar | Series       | RED              |
| Temperature  | 150°C   | Type         | S                |