


PRODUCT NO.: 59312102

SCREW CONNECTOR M16X1,5F/3/8"M SS

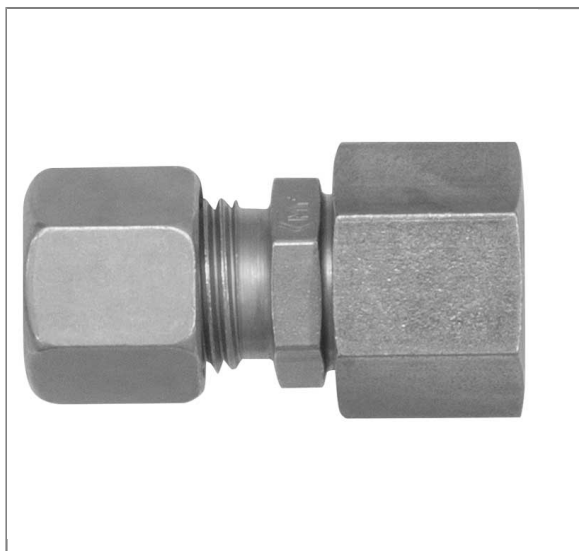

24° DIN Compression pipe couplings
Straight reducer with 24° DKO swivel and 24° cone end
Pipe diameter 1: 12 mm
Pipe diameter 2: 10 mm
Length: 42 mm
Type REDV, cone 24°
Whitworth pipe thread
Material: Stainless steel (V4A 1.4571 / AISI 316 TI)

Which operating pressure for stainless steel?

Light series: L

Nominal pressure acc. to DIN 2401 -> 315 bar

Standard tube connection program complies with DIN 2353 and ISO 8434-1

Technical data

Connection 1	12 mm	Connection 2	10 mm
Material	Stainless steel	Pressure	315 bar
Series	RED	Temperature	150°C
Type	L		